

Thermal and Electrical Conductivities of Fifty-Two Selected Nigerian Timbers

¹I.P. Udeozo, ²A.N. Eboatu, ²N.L. Umedum, ³I.H. Kelle and ²N.h. Okoye

¹Department of Chemical Sciences, Tansian University Umunya, Anambra State, Nigeria

²Department of Pure and Industrial Chemistry,

Nnamdi Azikiwe University, Awka, Anambra State, Nigeria.

³Department of Chemistry, National Open University, Lagos, Nigeria.

Abstract: The effect of thermal and electrical conductivities of fifty-two selected Nigerian timbers was analyzed. The results showed that *C.vogelli* and *G. arborea* with thermal conductivity of $10.06 \times 10^2 \mu\text{moh/cm}$ had the ODDs of $36.6 \times 10^{-2} \text{g.cm}^{-3}$ and $40.3 \times 10^{-2} \text{g.cm}^{-3}$ respectively; *G. kola* and *C. barteri* with thermal conductivity of $10.92 \times 10^2 \mu\text{moh/cm}$ had the ODDs of $48.5 \times 10^{-2} \text{g.cm}^{-3}$ and $49.9 \times 10^{-2} \text{g.cm}^{-3}$ respectively. It was however observed that the ODDs of those timbers with equal thermal conductivities were close. The results also showed that the timbers; *Cordia millenii* with electrical conductivity of $2.8 \times 10^{-3} \text{ sm}^{-1}$ had the least electrical conductivity while *Tetrapleura tetraptera* with electrical conductivity of $8.6 \times 10^{-3} \text{ sm}^{-1}$, had the highest electrical conductivity. There were fifteen set of timbers with equal electrical conductivities. Some of them were: *Allanblackia floribunda* and *Spathodea campanulata* with electrical conductivity of $3.6 \times 10^{-3} \text{ sm}^{-1}$; *Berlinia grandiflora*, *Phyllanthus discioides* and *Homdinu letestui* with electrical conductivity of $3.9 \times 10^{-3} \text{ sm}^{-1}$. Since electrical conduction is influenced by presence of ions, it was necessary to look at the effect of metal concentration in these timbers. *C. macrocarpum* with the least AMC of $1.16 \times 10^{-10}\%$ had the electrical conductivity of $1.91 \times 10^{-3} \text{ sm}^{-1}$ while *M. oleifera* with the highest AMC of 13.07 recorded electrical conductivity of $0.65 \times 10^{-3} \text{ sm}^{-1}$. The first and second highest electrical conductivity timbers were *B. breviscuspe* and *P. elliotii* with electrical conductivities of $3.4 \times 10^{-3} \text{ sm}^{-1}$ and $3.22 \times 10^{-3} \text{ sm}^{-1}$ respectively have far wide range AMC of $1.58 \times 10^{-10}\%$ and $3.09 \times 10^{-10}\%$. Those timbers with equal electrical conductivities had varied average metal concentrations. Therefore, there was neither direct nor inverse relationship between electrical conductivity and average metal concentration. The average metal concentration of these timbers was not dependent on the electrical conductivity. The small difference in ODDs of different timbers with equal thermal conductivity could be attributed to the effect of difference in anatomical structure of different woods and the possible influence of certain inorganic extractives present in some woods.

Key words: Thermal conductivity • Electrical conductivity • Average metal concentration and Nigerian timbers

INTRODUCTION

Thermal conductivity is a measure of the rate of heat flow in response to a temperature gradient. In wood, the rate depends on the direction of heat flow with respect to the grain orientation [1]. Dry wood is one of the poorest conductors of heat and this characteristic renders it eminently suitable for many of the uses to which it is put everyday e.g as a building material, internal wall paneling and as handles of cooking utensils [2]. The transmission or conduction of heat depends on two factors:

- The specific conductivity and
- The specific heat of the intervening material.

Although, the specific conductivity of dry wood substance is low, that of timber is even lower. Wood is a cellular substance, in the dry state, the cell cavities are filled with air which is one of the poorest conductors known. The cellular structure of wood also partly explains why heat is conducted about two to three times as rapidly along the grain compared with across it and that heavy woods conduct heat more rapidly than light porous ones [1, 2].

The specific heat of a substance is the amount of heat required to raise the temperature of one gram of that substance by 1°C. The specific heat of wood is about 50 percent higher than that of air and four times as high as that of copper [1]. The reaction of timber to heat has an important bearing on its suitability as a fire-resistant material. Because of the relatively high specific heat and poor conductivity of wood, wooden doors are often effective in preventing the spread of a fire for a considerable period.

Thermal conductivity is influenced by density. It is linearly proportional to density, so for denser woods, the thermal conductivity is higher. It is also influenced by the amount of water in a piece of wood [1]. For wood with moisture content greater than 40%, thermal conductivity is about 1/3 greater than a piece with moisture content less than 40% (more H₂O, more conductivity) [1].

Dry wood offers practically complete resistance to the passage of an electric current, but the presence of moisture renders it a partial conductor. Besides the moisture content of a piece of wood, its density and the species influence its electrical conductivity. For example, *lignum vitae* and certain other dense woods have been used for insulation purposes; they are sometimes impregnated with wax to keep out moisture, thereby maintaining their insulating properties. The insulation capacity is lower along the grain, it is lower for higher density woods (more air = more insulation) and lower for higher moisture content (more water, lower insulation). The small differences in electrical conductivity of different woods of the same density can be explained by attributing such variation to the effect of differences in anatomical structure of different woods and the possible influence of certain inorganic extractives present in some woods [1] and [2]. Just like thermal conductivity, electrical conductivity depends on wood structure direction and it is influenced by density and moisture content.

MATERIAL AND METHODS

Sample Collection and Preparation: The Fifty- two (52) timber samples were collected from Anambra, Enugu, Ebonyi, Imo, Delta, Edo, Cross River, Akwa Ibom, Abia, Oyo, Lagos, Kano, Sokoto and Rivers State, Nigeria. The timber samples were obtained from the timber sheds at Nnewi, Awka, Enugu, Abakaliki and Benin. The States from where these timbers were collected were ascertained from timber dealers and confirmed by literature [3], [4]. The timber dealers were able to give the Local or common names of the timbers while the botanical names were obtained with the aid of forest officers and the literature [3], [4].

The samples were taken to the saw mill at Nnewi Timber Shed where each timber was cut into two different shapes and sizes. Also dust from each timber was realized. The timbers were cut into splints of dimensions 30x 1.5 x 0.5cm and cubes of dimensions 2.5cm x2.5cmx 2.5cm i.e. 15.625 cubic centimeters. The splints were dried in an oven at 105°C for 24 h before the experiments.

Determination of Thermal Conductivity of Timbers by the Ash Method: The thermal conductivity of each timber sample was obtained from fraction of ash of the samples. It was calculated thus;

$$\text{Fraction of ash} = \frac{W_o}{W_i}$$

Where

W_o = ash weight (g)

W_i = dried sample weight (g).

The thermal conductivity of the timber samples was finally obtained by comparing the percentage of the ash obtained with conductance Ash Table for low conductivity cell [5].

$$\text{Percentage of ash} = \frac{W_o}{W_i} \times 100$$

Determination of Electrical Conductivity of Timber

Samples: A 2.5cm cubes of each timber sample was used. A four terminal ohmmeter, Make: Fluke co-operation, USA, MODEL: GOIR27/14 was used to measure the resistance of the solid by placing each set of terminals on opposing ends of the test material (timber sample). The resistance was recorded for each of the different timber samples. The dimensions of each timber samples in meters were determined, thereby getting the surface area. The distance between the ohmmeter terminals gave the length. The recorded length, resistance and the deduced area were used to calculate the electrical conductivity using this relation [1]:

$$S = L/AR$$

Where

S = electrical conductivity

L= distance between the ohmmeter terminals

A= surface area

R= resistivity of the timber

Table.1 Names of the Selected Fifty-Two (52) Timbers Used For This Research

S.No	Botanical Names	Igbo Names	Yoruba Names	Hausa Names	Areas of Location in Nigeria
1.	<i>Monodora tenuifolia</i>	ehuru ofia	lakesin	gujiyadanmiya	Port Harcourt
2.	<i>Pycnanthus angolensis</i>	Akwa-mili	akomu	akujaadi	Calabar, Awka
3.	<i>Moringa oleifera</i>	okwe oyibo	ewe igbale	zogallagandi	Lagos, Ibadan
4.	<i>Protea elliptica</i>	okwo	dehinbolorun	halshena	Nsukka
5.	<i>Caloncoba glauca</i>	udalla-enwe	kukandika	alibidu	Onitsha
6.	<i>Barteria nigritiana</i>	ukwoifia	oko	idonzakara	Nsukka, Enugu
7.	<i>Bacteria fistulosa</i>	oje	oko	kadanya	Awka
8.	<i>Anogeissus leiocarpus</i>	atara	ayin	marike	Onitsha, Awka
9.	<i>Rhizophora racemosa</i>	ngala	egba	loko	Calabar
10.	<i>Allanblackia floribunda</i>	egba	eku, eso roro	guthiferae eku	Calabar, Ikom
11.	<i>Garcinia kola</i>	adi	orogbo	namijin-goro	Onitsha, Nnewi
12.	<i>Glyphae brevis</i>	anyasu alo	atori	bolukonu kanana	Calabar
13.	<i>Hildegaridia barteri</i>	ufuku	eso, shishi	kariya	Okigwe
14.	<i>Sterculia oblonga</i>	ebenebe	oroforofo	kukuki	Ibadan
15.	<i>Cola laurifolia</i>	ufa	aworiwo	karanga	Onitsha, Calabar
16.	<i>Bombax brevisuspe</i>	akpudele	awori	kurya	Ikom
17.	<i>Bridelia micrantha</i>	ogaofia	ida odan	kimi	Calabar, Ikom
18.	<i>Bridelia ferruginea</i>	ola	ira odan	kimi and kizini	Onitsha, Awka
19.	<i>Uapaca guineensis</i>	Obia	abo-emido	wawan kurmi	Onitsha
20.	<i>Antidesma venosum</i>	okoloto	aroro	kimi	Onitsha, Udi
21.	<i>Parinari robusta</i>	ohaba-ujji	idofun	kasha-kaaji	Onitsha
22.	<i>Cynometra vogelii</i>	ubeze	anumutaba	alibida	Onitsha, Abakali
23.	<i>Amphimas pterocarpoids</i>	awo	ogiya	waawan kurmi	Umuahia, Iko
24.	<i>Lovoa trichilodes</i>	sida	akoko igbo	epo-ipa	Calabar
25.	<i>Berlinia grandiflora</i>	ububa	apodo	dokar rafi	Enugu
26.	<i>Albizia adianthifolia</i>	avu	anyimebona	gamba	Enugu, Nsukka
27.	<i>Oncoba spinosa</i>	akpoko	kakandika	kokochiko	Onitsha
28.	<i>Dichapetalum barteri</i>	ngbu ewu	ira	kimi	Onitsha, Agulu
29.	<i>Azela bipindensis</i>	aja	olutoko	rogon daji	Benin
30.	<i>Azela bella</i>	uzoaka	peanut	epa	Owerri, Orlu
31.	<i>Erythroleum ivorens</i>	inyi	erun	idon zakara	Ogoja, Ijebu
32.	<i>Dichrostacy cinerea</i>	amiogwu	kara	dundu	Onitsha
33.	<i>Pentaclethra macrophylla</i>	ugba	apara	kiriya	Onitsha
34.	<i>Tetrapleura tetraptera</i>	oshosho	aridan	dawo	Onitsha
35.	<i>Stemonnocoleus micranthus</i>	nre		waawan kurmi	Ukpor, Awka
36.	<i>Ptilostigma thonningii</i>	okpoatu	abafe	kalgo	Kano, Oyo
37.	<i>Hymenocardia acida</i>	ikalaga	orupa	jan yaro	Awka, Enugu
38.	<i>Afromosia laxiflora</i>	abua ocha	shedun	don zakara	Sokoto
39.	<i>Phyllanthus discoides</i>	isinkpi	ashasha	baushe	Enugu, Ikom
40.	<i>Gardenia imperialis</i>	uli	oroto	karandafi	Jos
41.	<i>Macaranga hurifolia</i>	awarowa	ohaha		Awka
42.	<i>Sacoglottis gabonensis</i>	nche	atala	chediya	Rivers
43.	<i>Cassipourea barteri</i>	itobo	odu	daniya	Eket
44.	<i>Combretodendron macrocarpum</i>	anwushi	akasun		Udi, Owerri
45.	<i>Lophira lanceolata</i>	okopia	iponhon	namijin kadai	Udi
46.	<i>Homalinum letestui</i>	akpuruukvu	out,obo-ako		Ikom
47.	<i>Cordia millenii</i>	okwe	omo	waawan kurmi	Owerri
48.	<i>Gmelina arborea</i>	gmelina	igi Melina	kalankuwa	Ibadan
49.	<i>Drypetes aframensis</i>		tafia		Ibadan
50.	<i>Khaya ivorens</i>	ono	oganwo	madachi	Calabaar
51.	<i>Spathodea campanulata</i>	imiewu	Oruru	delinya	Onitsha
52.			Shanty		

RESULTS AND DISCUSSION

Figure 1 displays the graph of thermal conductivity of Nigerian timbers in their decreasing order of magnitude. *Dichapetalum barteri* recorded the least thermal conductivity of 4.28×10^{-2} $\mu\text{moh/cm}$ whereas *Bombax brevisuspe* had the highest thermal conductivity of 51.34×10^{-2} $\mu\text{moh/cm}$.

Figure 2 represents the graph of thermal conductivity against ODD. Some set of timbers with equal thermal conductivities and varied ODD were as Follows: *C.vogelii* and *G. arborea* with thermal conductivity of 10.06×10^2

$\mu\text{moh/cm}$ had the ODDs of $36.6 \times 10^{-2} \text{g.cm}^{-3}$ and $40.3 \times 10^{-2} \text{g.cm}^{-3}$ respectively; *G. kola* and *C. barteri* with thermal conductivity of 10.92×10^{-2} $\mu\text{moh/cm}$ had the ODDs of $48.5 \times 10^{-2} \text{g.cm}^{-3}$ and $49.9 \times 10^{-2} \text{g.cm}^{-3}$ respectively. It was however observed that the ODDs of those timbers with equal thermal conductivities were close. The small difference in ODDs of different timbers with equal thermal conductivity can be explained by attributing it to the effect of difference in anatomical structure of different woods and the possible influence of certain inorganic extractives present in some wood [2]. The timber; *D. barteri* with the least thermal

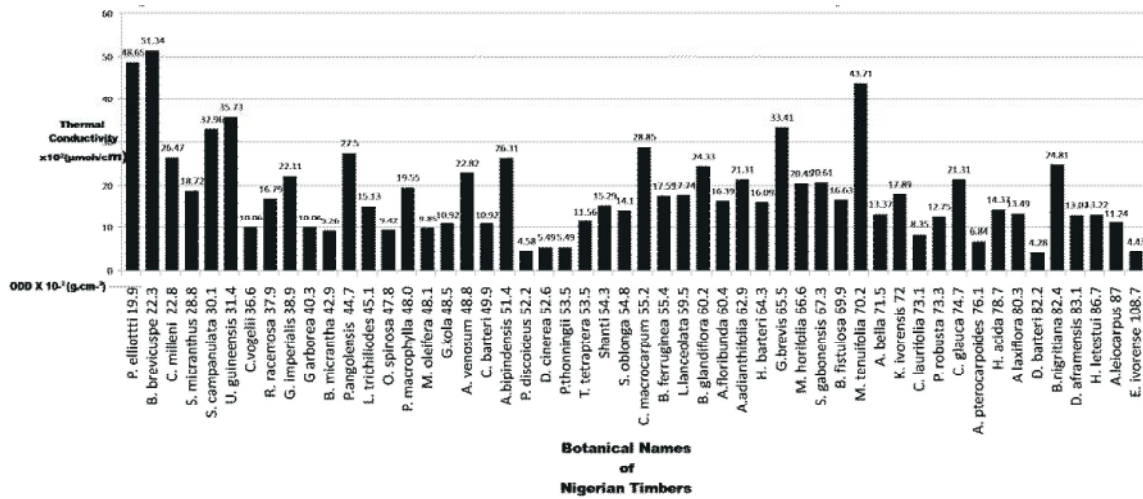


Fig. 1: Effect of ODD on Thermal Conductivity

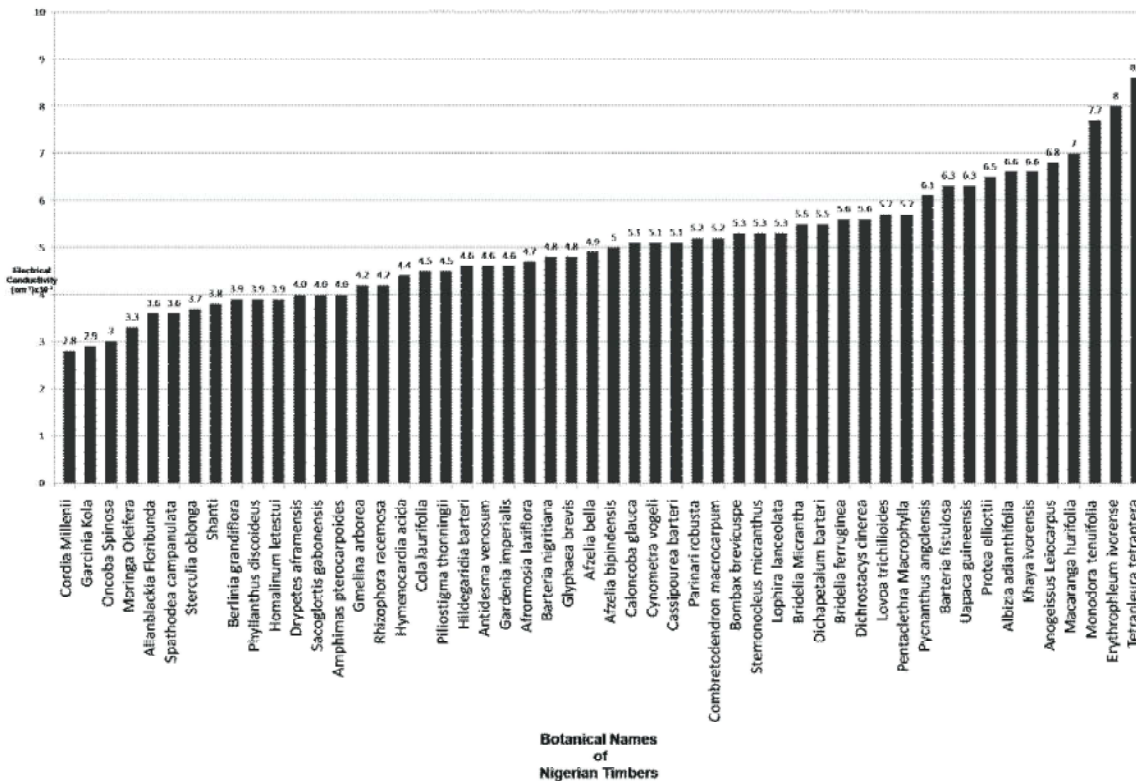


Fig. 2: Electrical Conductivities of Nigerian Timbers

conductivity of $4.28 \times 10^{-2} \mu\text{moh/cm}$ had ODD of 82.2 10^{-2}g.cm^{-3} while *B. breviscusp* with the highest thermal conductivity of $51.34 \times 10^{-2} \mu\text{moh/cm}$ recorded ODD of 22.3 10^{-2}g.cm^{-3} . It is observed from Figure 2 that thermal conductivity of the timbers increases somewhat as the ODD decreases and decreases as the ODD increases. Moreover, there exist some timbers with low thermal conductivity at low ODD and some with high thermal

conductivity at high ODD. This observation shows that in the absence of difference in their anatomical structures, there is an inverse relationship between thermal conductivity of these timbers and their ODDs.

Electrical conductivity through material is the passage of electric current and depends on such factors like moisture content, density, difference in anatomical structures and inorganic extractives present in some

woods. Figure 1 indicated the graph of electrical conductivity of fifty two selected Nigerian timbers. The graph was arranged in increasing order of magnitude. The timbers; *Cordia millenii* with electrical conductivity of $2.8 \times 10^{-3} \text{ sm}^{-1}$ had the least electrical conductivity while *Tetrapleura tetraptera* with electrical conductivity of $8.6 \times 10^{-3} \text{ sm}^{-1}$, had the highest electrical conductivity. There were fifteen set of timbers with equal electrical conductivities. Some of them were: *Allanblackia floribunda* and *Spathodea campanulata* with electrical conductivity of $3.6 \times 10^{-3} \text{ sm}^{-1}$; *Berlinia grandiflora*, *Phyllanthus disciodeus* and *Homdinu letestui* with electrical conductivity of $3.9 \times 10^{-3} \text{ sm}^{-1}$. Since electrical conduction is influenced by presence of ions, it was necessary to look at the effect of metal concentration in these timbers.

Figure 2 depicts the graph of electrical conductivity against average metal concentration. The graph shows that, *C. macrocarpum* with the least AMC of $1.16 \times 10^{-10}\%$ had the electrical conductivity of $1.91 \times 10^{-3} \text{ sm}^{-1}$ while *M. oleifera* with the highest AMC of 13.07 recorded electrical conductivity of $0.65 \times 10^{-3} \text{ sm}^{-1}$. The first and second highest electrical conductivity timbers were *B. brevicuspe* and *P. elliotii* with electrical conductivities of $3.4 \times 10^{-3} \text{ sm}^{-1}$ and $3.22 \times 10^{-3} \text{ sm}^{-1}$ respectively have far wide range AMC of $1.58 \times 10^{-10}\%$ and $3.09 \times 10^{-10}\%$. Those timbers with equal electrical conductivity have varied average metal concentrations.

CONCLUSION

In conclusion, the results obtained from this research showed that there was an inverse relationship between thermal conductivities of the fifty two selected Nigerian timbers and their oven dry densities but such relationship exist only in the absence of difference in their anatomical structures. There was also, neither direct nor inverse relationship between electrical conductivity and average metal concentrations of the fifty two selected Nigerian timbers.

REFERENCES

1. Properties of wood, Society of Wood Science and Technology, No. 1 Gifford Pinchot Drive, Madison, WI53726-2398 <http://www.swst.org>.
2. Desch H.E and Dinwoodie J.M. (1981): Timber, its structure, properties and utilization, Macmillan Press Ltd, London, 6th Edition, pp: 155-208.
3. Esau, K. , 2007. Plant Anatomy, John Wiley and Sons Inc, New York, pp: 393.
4. Akindele, S.O. and V.M. LeMay, 2006. Development of tree volume equations for common timber species in the tropical rain forest area of Nigeria. *Journal of Forest Ecology and Management*. 226: 41-48.