

Review of Current Palm Oil Mill Effluent (POME) Treatment Methods: Vermicomposting as a Sustainable Practice

Parveen Fatemeh Rupani, Rajeev Pratap Singh, M. Hakimi Ibrahim and Norizan Esa

School of Industrial Technology, Universiti Sains Malaysia, 11800, Pulau Pinang, Malaysia

Abstract: The total oil palm cover has increased in the last few years, with a consequent boost in palm oil production. As a result, palm oil waste which is a by-product of the milling process will also increase. The palm oil production process in mills consists of several unit operations. The processing of fresh fruit bunches of oil palm results in the generation of different types of residue. Among the waste generated, palm oil mill effluent (POME) is considered the most harmful waste for the environment if discharged untreated. Palm oil mill effluent is a thick brownish liquid that contains high solids, oil and grease, COD and BOD values. Several treatment technologies have been used for POME treatment, since the direct discharge of POME adversely affects the environment. Due to the presence of high total solids in POME, attempts have been made to convert this waste into valuable products such as feed stock and organic fertilizer. Although POME is organic in nature, it is difficult to decompose in natural conditions. Earthworms can digest the POME producing valuable products such as vermicompost. Vermicompost is a useful product rich in nutrients that can be used as fertilizer in oil palm plantations. This review discusses the various ongoing treatment techniques of POME. The effective treatment of POME using vermicomposting technique is suggested as a good alternative sustainable management practice of this waste.

Key words: Oil palm · Palm oil mill effluent · Palm oil mill waste · Vermicomposting

INTRODUCTION

Palm oil is one of the world's most rapidly expanding equatorial crops. Indonesia and Malaysia are the two largest oil palm producing countries and is rich with numerous endemic, forest-dwelling species. Having tropical climate Malaysia is prosperous in natural resources. Oil palm currently occupies the largest acreage of farmed land in Malaysia [1]. Currently, Malaysia and Indonesia are both together account for 90% of palm oil world export trade [2].

The total oil palm acreage from year 1970-2000 has increased from 320 - 3,338 hectares. However, the agricultural acreage of rubber and coconut has decreased by the year 2000 as compared to 1970 (Table 1). In the year 2003 there were more than 3.79 million hectares of land under palm oil cultivation, occupying more than one-third of the total cultivated area and 11% of the total land area of Malaysia [3].

Palm oil, an edible oil, is derived from the fleshy mesocarp of the fruit of oil palm (*Elaeis guineensis*).

Table 1: Malaysia - Agricultural Acreage 1970-2000 [1000 Hectares]

Crops	1970	1985	1990	1995	2000
Oil palm	320	1,482	2,030	2,540	3,338
Rubber	2,182	1,949	1,837	1,679	1,590
Rice	533	655	681	673	692
Coconut	349	334	316	249	116

Source: [1].

One hectare of oil palm produces about 10 - 35 tonnes of fresh fruit bunches (FFB) per year [4]. The oil palm has a lifespan of over 200 years, while the economic life is about 20-25 years. The nursery period is 11-15 months for plants and first harvest is done after 32-38 months after planting. Palm oil plant takes 5-10 years for to reach its peak yield. The yield is about 45-56% of FFB and the fleshy mesocarp of the fruit is used to obtain oil. Yield of oil from the kernel is about 40-50% [5]. Both mesocarp and kernel of fruit produces about 17 t ha⁻¹ yr⁻¹ of oil [5]. From 5.8 tonnes of FFB about 1 tonne of crude palm oil (CPO) is produced [4].

Corresponding Author: M. Hakimi Ibrahim, Environmental Technology Division, School of Industrial Technology, Universiti Sains Malaysia, 11800, Pulau Pinang, Malaysia.
Tel: +604-6532217, Fax: +604-6573678, E-mail: mhakimi@usm.my.

While the oil palm industry has been recognized for its contribution towards economic growth and rapid development, it has also contributed to environmental pollution due to the production of huge quantities of by-products from the oil extraction process [7]. The waste products from oil palm processing consist of oil palm trunks (OPT), oil palm fronds (OPF), empty fruit bunches (EFB), palm pressed fibres (PPF) and palm kernel shells, less fibrous material such as palm kernel cake and liquid discharge palm oil mill effluent (POME) [4, 8, 9].

According to Prasertsan and Prasertsan [10], during processing in the palm oil mill more than 70% (by weight) of the processed fresh fruit bunch (FFB) was left over as oil palm waste. According to Pleanjai *et al.* [11], fiber, shell, decanter cake and empty fruit bunch (EFB) accounts for 30, 6, 3 and 28.5% of the FFB processing, respectively. According to Yacob *et al.* [12], 381 palm oil mills in Malaysia generated about 26.7 million tonnes of solid biomass and about 30 million tonnes of palm oil mill effluent (POME) in year 2004. Discharging the effluents or by products on the lands may results in environmental pollution and might deteriorate the surrounding environment. There is an urgent need for a sound and efficient management system for the treatment of these by-products in a way that will help to conserve the environment and check the deterioration of air and river water quality. Treatment of POME is necessary to avoid environmental pollution. There is a growing interest in composting as well as vermicomposting process. Since wastes from oil palm mill are biological in nature, composting as well as vermicomposting can be an excellent sustainable waste management option of this waste.

Vermicomposting represents a cost effective and speedy biotechnological process to covert organic substances into stabilized humus like byproducts using worms [13, 14]. Soil microorganisms, such as earthworms have considerable potential to boost the decomposition process, consequently it reduces the waste volume and resulted into the value added product [15, 16]. The present review discusses the various POME treatment methods currently in use and assesses the potential of composting as well vermicomposting as an alternative sustainable management practice of this liquid waste.

Malaysian Oil Palm Industry: Frenchman Henri Fauconnier and his associate Hallet, has been credited for the expansion of the oil palm industry in Malaysia. The first commercial oil palm plantation was established by Fauconnier at Tennamaram Estate, to replace an ineffective planting of coffee bushes [17]. Oil palm, *Elaeis guineensis*, belonging to the Palmae family, is the most productive oil producing plant in the world. The oil palm contains a high nutrient which primarily depends on the yield potential determined by the genetic make-up of the planting material and yield limit set by climatic factor such as water, effective sunshine and temperature [18]. Nigeria was left behind by Malaysia as world's leading producer and exporter of palm oil in year 1966 and 1971, respectively [19-21]. According to Malaysian palm oil board [22] the global production of palm oil and the plantation area has been increased. Malaysia contributes 41% of the world production (Figure 1).

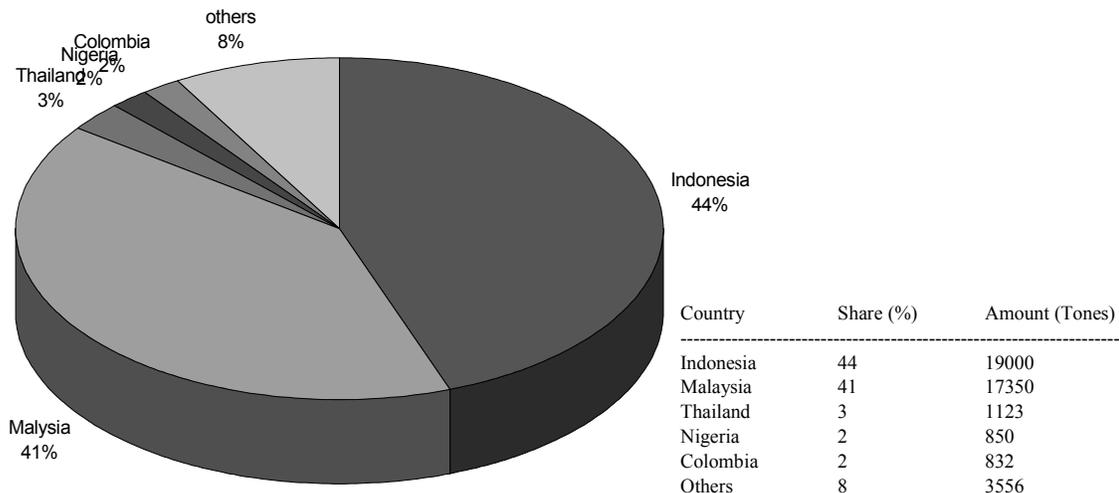


Fig. 1:

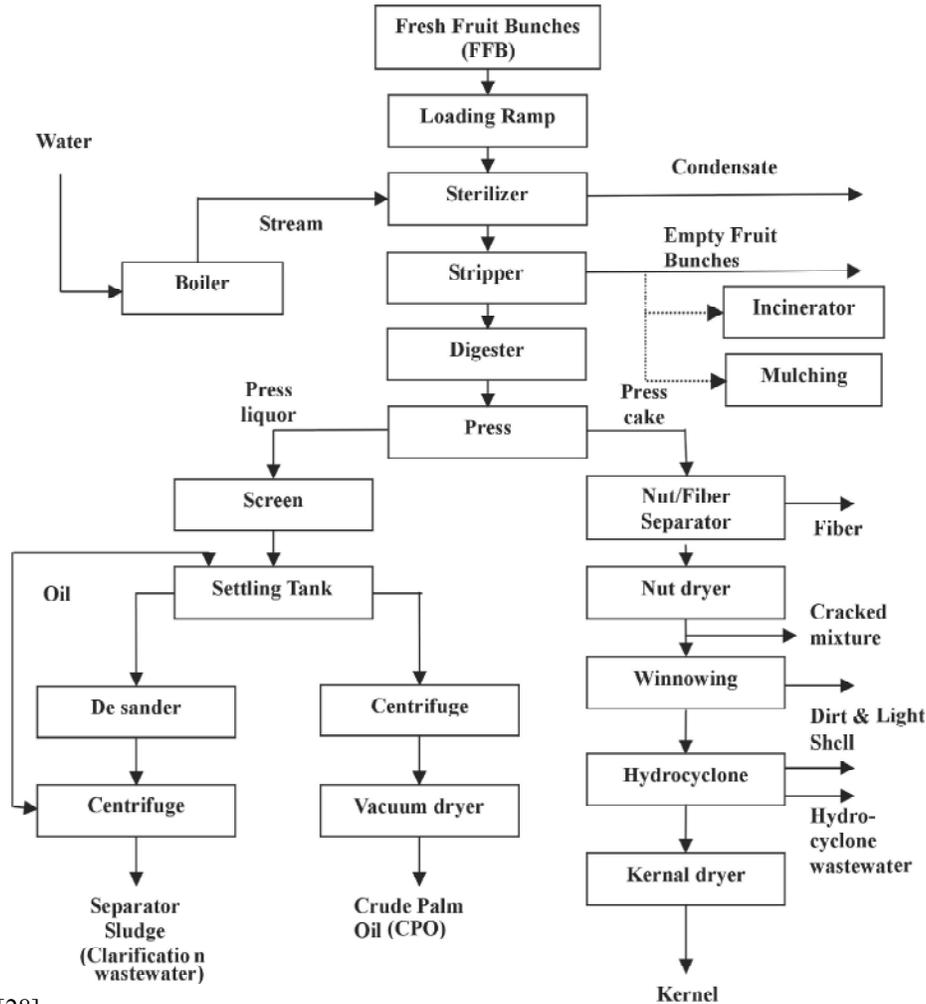


Fig. 2: Source [28]

Palm Oil Production Process: Several unit processes are involved in order to extract palm oil after the fresh fruit bunches (FFB) are transported to the palm oil mills. Two types of oils are produced from oil palm, one is the palm oil from the fibrous mesocarp and another is lauric oil produced from the palm kernel. The major steps of palm oil processing are shown in Figure 2.

Sterilization: The initial step in extraction of crude palm oil is sterilization. Fresh fruit bunches (FFB) are sterilized inside autoclave using steam at about 140°C for a period of 75-90 minutes. The purpose of sterilization process is to deactivate hydrolytic enzymes responsible for the breakdown of oil to free fatty acids and to loosen the fruits from bunches. The mucilage will be coagulated due to breaking of oil cells. One of the major sources of wastewater in this step is represented by the steam condensate coming out of the sterilizer [23].

Stripping or Threshing: After sterilization process fruits are stripped and separated from the bunch in a rotary drum stripper. The fruits are lifted and dropped through the stripper in order to be knocked out of the bunches. The detached fruits fall through the space between the bars on the stripper and collected in a bucket conveyor and discharged into a digester. The resulting waste from this step is empty fruit bunches (EFB).

Digestion: Digestion process involves the mashing up the fruits under steam heated condition in a digester. The digester is a vertical cylindrical vessel fitted with rotating arms. The action of mashing the fruits under heating is to break the mesocarp oil-bearing cells. Hot water is added in digester to enhance the flow of the oils. No residue occurs in this step.

Table 2: Characteristic of raw POME and the regulatory discharge limits

Parameters	Value ^a	Regulatory discharge limits ^b
Temperature (°C)	80-90	45
pH	4.7	5.0-9.0
Biochemical Oxygen Demand BOD ₃ ;3days at 30 °C	25.000	100(50)
Chemical Oxygen Demand	50.000	-
Total Solids (T.S)	40.500	-
Total Suspended Solids (T.S.S)	18.000	400
Total Volatile Solids (T.V.S)	34.000	-
Oil and Grease (OandG)	4.000	50
Ammonia-Nitrate (NH ₃ -N)	35	150
Total Kjeldahl nitrogen (TKN)	750	200

*All values, except pH and temperature, are expressed in mgL⁻¹; POME= Palm oil mill effluent

Sources: a [31], b [27].

Palm Oil Extraction: Homogeneous oil mash coming out from the digester is passed through a screw press subsequently by a vibrating screen, a hydrocyclone and decanters to remove the fine solids and water. The oil is purified by using the centrifuge and vacuum drier ahead of sending it to the storage tank. The storage will maintain the temperature to 60°C with steam coil heating. The crude oil slurry is then fed into a clarification system for oil separation and purification. The fiber and nuts are separated by passing through the depericarper [23]. The crude palm oil (CPO) contains a mixture of palm oil (35-45%), water (45-55%) and fibrous materials in different portions. After passing the CPO from the screw presser it will be pumped to a horizontal or vertical clarification tank to skim the oil from top of the clarification tank. The crude palm oil is then passed through a high speed centrifuge and a vacuum dryer before being sent to storage tanks. The major wastes of this stage are decanter wastewater and decanter cake.

Generation of Waste in Palm Oil Mills: Huge quantities of waste are produced in the oil palm mill. The process of oil extraction leads to the generation of liquid waste commonly referred as palm oil mill effluent (POME). Palm oil mill effluent is generated mainly from oil extraction, washing and cleaning processes in the mill and these contains cellulosic material, fat, oil and grease etc [24]. Palm oil mill effluent also contains significant amounts of solids, both suspended solids and total dissolved solids in the range of 18,000 mg L⁻¹ and 40,000 mg L⁻¹ respectively (Table 2). These solids are commonly known as palm oil mill sludges (POMS). The solid waste that are produced in the process of extraction are the leaves, trunk, decanter cake, empty fruit bunches, seed shells and fibre from the mesocarp.

Palm Oil Mill Effluent (POME): Characteristics of palm oil mill effluent depend on the quality of the raw material and palm oil production processes in palm oil mills. The extraction of crude palm oil from FFB requires enormous amounts of water. It has been estimated that 5-7.5 tonnes of water is required for the production of 1 tonne crude palm oil and more than 50% of the water ends up as palm oil mill effluent (POME) [25-27]. Sethupathi [28] has categorized three major processing operations responsible for producing the POME. Sterilization of FFB, clarification of the extracted CPO, hydrocyclone separation of cracked mixture of kernel and shell. Hydrocyclone contributes about 36, 60 and 4% of POME respectively in the mills. Based on palm oil production in 2005 (14.8 million tonnes), Lorestani [29] estimated that in Malaysia about 53 million m³ POME is being produced every year. Yacob *et al.* [30] estimated that about 0.5- 0.75 tonnes of POME will be discharged from mill for every tonne of fresh fruit bunch.

Wastewater composition depends mainly on the season, raw matter quality and the particular operations being conducted at any given time. Generally palm oil mill wastewater is low in pH because of the organic acids produced in the fermentation process, ranging about 4 - 5. It also contains large amounts of total solids (40,500 mg l⁻¹), oil and grease (4000 mg l⁻¹) [31]. Wastewater includes dissolved constituents such as high concentration of protein, carbohydrate, nitrogenous compounds, lipids and minerals, which may be converted into useful materials using microbial processes. The effluents from palm oil mill may lead to considerable environmental problems, if discharged untreated [4, 32]. Therefore, the challenge of converting POME into an environmental friendly waste requires an efficient treatment and effective disposal technique.

Regulatory Standards for Palm Oil Mill Effluent: Malaysian experiences in effluent control in the palm oil industry reveal that a set of well designed environmental policies can be very effective in controlling industrial pollution in a developing country. The Environmental Quality (prescribed Premises) (Crude Palm Oil) Regulations 1977, promulgated under the enabling powers of Section 51 of the EQA, are the governing regulations and contain the effluent discharge standards. Other regulatory requirements are to be imposed on individual palm oil mills through conditions of license according to Environmental Quality Act 1974 [27]. The effluent discharge standards usually applicable to crude palm oil mills are presented in Table 3.

Table 3: Effluent discharge standards for crude palm oil mills (Environmental Quality Act 1974, 2005).

Parameter	Unit	Parameter Units		Remarks
		(second schedule)		
Biochemical Oxygen Demand				
BOD; 3days- 30°C	mg/l	100		
Chemical Oxygen Demand (COD)	mg/l	*		
Total Solids				
Suspended Solids	mg/l	400		
Oil and Grease	mg/l	50		
Ammoniacal Nitrogen	mg/l	150		Value of filtered sample
Total Nitrogen	mg/l	200		Value of filtered sample
pH	-	5-9		
Temperature	°C	45		

* No discharge standard after 1984 Source: [33]

Table 4: Characteristics of individual waste water streams (Industrial Process and The Environment 1999)

Parameters	Sterilizer condensate	Oil clarification wastewater	Hydrocyclone wastewater
pH	5.0	4.5	-
Oil and Grease	4.000	7.000	300
BOD;3-day,30 °c	23.000	29.000	5.000
COD	47.000	64.000	15.000
Suspended solid	5.000	23.000	7.000
Dissolve solid	34.000	22.000	100
Ammonical Nitrogen	20	40	-
Total Nitrogen	500	1.200	100

* All the units are in mg/L except for pH

Malaysia is identified as the country that produces the largest pollution load in the river [34]. Due to this fact, the palm oil industry faces the challenge of balancing the environmental protection, its economical viability and sustainable development. There is an urgent necessity to find an approach to preserve the environment while keeping the economy mounting.

Characteristics of Palm Oil Mill Effluent (POME):

Fresh POME is a hot, acidic (pH 4-5), brownish colloidal suspension containing high concentrations of organic matter, high amounts of total solids (40,500 mg L⁻¹), oil and grease (4,000 mg L⁻¹), COD (50,000 mg L⁻¹) and BOD (25,000 mg L⁻¹) [31]. The characteristic of typical POME is given in Table 2. The distinctive characteristic of the individual wastewater streams coming out of palm oil mill from the three principal source of generation is given in Table 4. According to Vairappan and Yen [35], 66.8 million tonnes of POME was generated in year 2005. The raw or partially treated POME has an extremely high content of

degradable organic matter. As no chemicals are added during the oil extraction process, POME is considered as non toxic, but it is identified as a major source of aquatic pollution by depleting dissolved oxygen when discharged untreated into the water bodies [36]. However it also contains substantial amounts of N, P, K, Mg and Ca [37, 38], which are the vital nutrient elements for plant growth. Due to the non toxic nature and fertilizing properties, POME can be used as fertilizer or animal feed substitute in terms of providing sufficient mineral requirements.

Muhrizal [38], reported that POME contains high content of Al as compared to chicken manure and composted sawdust. According to Habib *et al.* [37] toxic metals, such as Pb, can also be focused in POME, but their concentrations are usually below sublethal levels (>17.5 µg /g) [39]. According to James *et al.* [39], Pb is found in POME as a result of contamination from plastic and metal pipes, tanks and containers where Pb is widely used in paints and glazing materials.

Palm Oil Mill Effluent Treatment Technologies:

Land application of palm oil mill effluent (POME) is one of the disposal alternatives. Discharging the POME on the land results in clogging and water logging of the soil and kills the vegetation on contact. However, Wood *et al.*, [40] reported that these problems could be overcome by the controlled application of small quantities of POME at a time. The cheapest way of discharging of POME is to release it into the river, since POME is a non toxic oily waste. But discharge of effluent into water bodies cause water depletion and results in aquatic pollution [34]. Therefore, these problems make it essential to study the effect different types of treatments on POME quality and environment. Several researchers have studied the various aspects of palm oil mill effluent treatment [41-45].

Physical pretreatment of POME consist of stages such as screening, sedimentation and oil removal prior to the secondary treatment in biological treatment system. According to Hojjat and Salleh [46] the combination of two processes of acidification pond and flocculation treatment is a developed pretreatment process. Hojjat and Salleh [46] showed that both centrifugation and coagulation gave different pretreatment quality which was reported to be better than that of pretreatment by filtration method. Apart from this process, different chemicals are used in flocculation such as alum, aluminium chlorohydrate, aluminium sulfate etc. There are some natural products such as chitosan (poly D- glucosamine)

that have been used in flocculation. Chitosan is a natural organic polyelectrolyte of high molecular weight and charge density; obtained from deacetylation of chitin. As the suspended solids in POME are mainly associated with its organic matter, therefore chitosan can effectively remove most of the colloidal and suspended organic matter contents, but is less efficient in removing of dissolved organic matter [47]. Solvent extraction method was used by Hameed *et al.* [48] for removal of residual oil from POME as a pretreatment process. Hameed *et al.* [48] reported that the percentage extraction of oil from POME increased with the increase of mixing time, solvent/feed ratio and mixing rate for all solvents.

According to Perez *et al.* [49], anaerobic process is a suitable treatment method due to the organic characteristic of POME. Therefore ponding system is the most conventional method for treating POME [9, 36, 50, 51]. The pond systems have been applied in Malaysia for POME treatment since 1982 and they are classified as waste stabilization pond [52]. More than 85% of palm oil mills exclusively use ponding systems due to their low costs [50]. Ponding systems are easy operating systems but they have some disadvantages such as occupying a vast amount of land mass, relatively long hydraulic retention time (HRT) of 45-60 d for the effective performance, bad odor and difficulty in maintaining the liquor distribution and biogas collection which results harmful effect on the environment [52-54]. In the oil palm mill, the ponding system of POME treatment is the main source of environment pollution. Huge amount of the strong green house gas methane with the biogas is emitted by the anaerobic ponds and the effluent of the ponds holds the nutrients accountable for surface and ground water pollution [55]. Every ton of crude palm oil produced is responsible for the emission of 46 m³ (32.9 kg) of methane, corresponding 384 m³ (756 kg) CO₂ equivalent [55].

There is a possibility of improvement of POME treatment by other processes such as aerobic and anaerobic digestions, physicochemical treatments and membrane filtration [21]. The organic substance of POME is generally biodegradable; therefore treatment by biodegradable process could be suitable, which are based on anaerobic, aerobic and facultative processes [28]. Anaerobic process or biological treatment has considerable advantages over other processes such as less energy demands, minimum sludge formation, no unpleasant odor and production of methane due to efficient break down of organic substances by anaerobic

bacteria [56]. According to Link [57] the anaerobic digestion process has great potential for rapid disintegration of organic matter to generate biogas that can be used in electricity generation and save fossil energy.

However, such biological practices are only applicable in the palm oil mills which acquire large area of lands [58]. According to Ahmad *et al.* [59] the treatment process that is based mainly on biological treatment is quite inefficient in treatment of POME, which may lead to several environmental pollution issues. This is largely due to the high BOD load and low pH of POME, together with the colloidal nature of the suspended solids, which renders POME treatments by environmental methods difficult [60, 61].

Several researchers have used the composting technology for managing the liquid waste coming from agroindustries. In order to attain adequate physical conditions for the earthworms' life and growth, the liquid waste coming from agroindustries are required to be blended with ligno-cellulosic material [62].

Macci *et al.* [62] carried out vermicomposting of olive oil mill wastewaters (OOMW) by absorbing them on ligno-cellulosic solid matrix. According to Macci *et al.* [62] the vermicomposting process could be an alternative and suitable technology for the management of OOMW. Even though OOMW are resistant to biological degradation, the joint action of earthworms and micro-organisms enhances its biodegradability and transformation into a non-toxic and value-added product that is useful for agricultural purposes [62].

This new approach can be used for the management of POME using the ligno-cellulosic material like empty fruit bunch (EFB), EFB fiber generated in huge amount during the process of extraction of palm oil from oil palm fruit. With in Malaysia, the Oil palm waste constitutes 94% of lignocellulosic material [7].

Palm Oil Mill Sludge (POMS) Characteristics: As it has been described earlier in section 4, palm oil mill effluent (POME) consists of suspended solids and dissolves solids which are left after POME treatment, commonly named as palm oil mill sludge (POMS). Therefore due to large quantity of POME production each year, the amount of POMS increases respectively. Palm oil mill sludge (POMS) has a higher nutrient value than the slurry [63]. It has high amount of moisture content, with the pH of 8.4 and enriched with nutrients. It has been shown in

Table 5: Physicochemical analysis of raw POMS and empty Fruit Bunch

Parameters	^a POMS (Average)	^b Empty fruit bunch
Moisture content%	85	60
pH	8.4	6.7 ± 0.2
Organic matter	60	-
Total Organic carbon (TOC)	33.0	-
Total Nitrogen (TN)	3.6	58.9(%)
Phosphorus (as P ₂ O ₅)	0.9	0.6± 0.1 (%)
Potassium (as K ₂ O)	2.1	2.4 ± 0.4 (%)

Sources: a [76], b [74], All values are in mgL⁻¹ except pH

Table 5, POMS contains 3.6, 0.9, 2.1 mg L⁻¹ of total nitrogen, phosphorus and potassium respectively. These sludges results in bad odors and is considered as a source of surface and ground pollution. Therefore, industries are looking for cost effective sustainable technologies for disposal of industrial sludges.

Palm Oil Mill Sludge (POMS) Management: The oil palm mills generate many by-products and wastes besides the liquid wastes that may have a significant impact on environment if they are not properly dealt with. Among these by-products palm oil mill sludges (POMS) as result of POME treatment plays crucial impact on the environment, which makes it necessary to find a proper technology for mitigating these wastes. According to Chooi [64], palm oil mill sludge (POMS) can be dried and used as a fertilizer as it contains high nutrient value. Drying is mostly done in open ponds, but during the rainy seasons this process becomes difficult due to slow rate of drying and over flow problem. Composting as well as vermicomposting technology can be used in POMS management.

Composting Technology: Composting, a microbial technology, is frequently used in stabilization of organic waste either from industrial origin or domestic waste. During the composting process, aerobic microorganisms decompose the substrate, therefore, most of the biodegradable organic compounds are broken down and a portion of remaining organic material is converted into humic acid like substances, with the production of chemically stabilized composted material [65, 66]. Due to rapid activation of microbes around the root systems the oxygen concentration decreases as a result of partially decomposed or unstable compost. In addition, chemically unstable compost is phyto-toxic due to production of ammonia, ethylene oxide and organic acids [67, 68]. Therefore, estimation of compost stability prior to its use is essential for recycling of organic waste in agriculture

soils [69]. The organic residues recycling in soil can mitigate environmental hazards resulting from intensive agriculture [70]. Composting is being advised since it can reduce the volume/weight of sludge [71]. According to Cayuela *et al.* [72], among the different technologies for olive mill waste recycling, composting is one of the most promising options to transform this material into a valuable organic amendment.

Several modification have been made for improving the composting process, increasing the degradation rate and quality of the final compost, such as the addition of biodegradable wastes to reach the optimum C/N ratio of about 30 [73], this is commonly known as co-composting. Baharuddin *et al.* [74] carried out co-composting process using partially treated POME with empty fruit bunches (EFB). The partially treated POME from anaerobic pond was sprayed onto the shredded EFB throughout the treatment. The compost obtained was reported to have considerable amount of calcium, magnesium, phosphorus, potassium and other micro nutrients, therefore it might be suitable to be used as fertilizer for plantation purpose [74]. Saw mills and furniture industries usually burns the saw dusts generated at the mills which results in air pollution problems. Mixing saw dusts with POMS can mitigate the air pollution and improve the efficiency of composting process [75]. Yaser *et al.* [76] carried out the co-composting process by using the palm oil mill sludge (POMS) with sawdust. The sludges were collected from anaerobic digestion pond and recycled compost came from kitchen waste was added to facilitate the composting process; also the saw dust was collected from the furniture factories. Nutrient content in POMS compost is comparable with other industrial sludge compost.

Yaser *et al.* [76], reported that final compost showed some fertilizer value, but needed to be adjusted to obtain an ideal substrate. As a result, compost of palm oil mill-saw dust mixed with sand was found to improve the growth of *Cymbopogon citratus* [76]. Therefore, composting can be a suitable method for converting palm oil mill sludge into compost that can be used as a fertilizer for plantation purposes.

Vermicomposting Technique: Vermicomposting is described as composting or natural conversion of biodegradable waste into high quality fertilizer with the help of earthworms. Vermicomposting is the process in which earthworms are used to convert organic materials into humus-like material known as vermicompost or earthworm compost. Through vermicomposting process physical, chemical and biological reactions take place,

Table 6: Nutrient composition of vermicompost and garden compost

Nutrient element	Vermicompost%	Garden compost%
Organic carbon	9.8-13.4	12.2
Nitrogen	0.51-1.61	0.8
Phosphorus	0.19-1.02	0.38
Potassium	0.15-0.79	0.48
Calcium	1.18-7.61	2.27
Magnesium	0.0093-0.568	0.57
Sodium	0.058-0.158	<0.01
Zinc	0.0042-0.110	0.0012
Copper	0.0026-0.0048	0.0017
Iron	0.2050-1.3313	1.1690
Manganese	0.013-0.2038	0.0414

Source: [82]

resulting changes in the organic matter. The resultant product (vermicast) is much more fragmented, porous and microbially active [77, 78]. In contrast to traditional microbial waste treatment, vermicomposting process results in bioconversion of the organic wastes into two useful products: the earthworm biomass and the vermicompost. Earthworm biomass can further be processed into proteins as a source of animal feeds [79, 80]. The latter product (vermicompost/casting) is considered as homogenous, has reduced levels of contaminants and tends to hold more nutrients. During the vermicomposting process, important plant nutrients such as nitrogen, phosphorus, potassium, etc. present in the waste are converted into much soluble and available to plants [81]. Nagavallema *et al.* [82] have reported that the nutrient composition of vermicompost may increase the plant nutrients as compared to the simple composting (Table 6).

Although various physical, chemical and microbial methods of disposal of organic solid waste are currently in use, these methods have some disadvantages and involve high cost. In this regard 'Vermicomposting' has been reported to be a viable, cost effective technique for the efficient management of the organic soil waste [83, 84]. Several researches have demonstrated the ability of earthworms to obtain the biodegradable part of the municipal solid waste as well as industrial wastes [85, 86].

Butt [87] reported solid paper mill sludge as a suitable feed for *Lumbricus terrestris* under laboratory conditions. The sludge of paper mill did not show adverse effect on the earthworms, although worm growth rate was poor. Elvira *et al.* [88] carried out the study on the efficiency of *Eisenia anderi* in bioconverting paper-pulp mill sludge mixed with primary sewage sludge. Elvira *et al.*

[88] reported that, the mixture of 3:1 ratio found to be suitable medium for optimum growth and reproduction of earthworms. The Epigeic earthworm species live in organic wastes and requires high moisture content, adequate organic material content and dark conditions for proper growth and development [89-91]. Hartenstein and Hartenstein [79] carried out the laboratory work study on vermicomposting of activated sludge and reported that approximately 1.0g worm could ingest 4.0g of activated sludge in 5 days. In order to make use of earthworms successful in vermicomposting, its survival, growth and fecundity in different wastes should be known [14].

As oil palm is a highly nutrient demanding crop, using waste from palm oil mill as fertilizer supplement in place of inorganic nutrients is an environmentally friendly option. Sabrina *et al.* [86] carried out a study on the vermicomposting of oil palm empty fruit bunches (EFB) and its potential in supplying of nutrients for crop growth. Sabrina *et al.* [86] placed 100g of air dried (<2mm) ground organic residue, empty fruit bunches (EFB) and oil palm frond into the plastic box (20 cm× 7.5 cm× 15 cm) and cover it with pierced lids for aeration. About 4.5g of dried cow dung was added to each box as a food supplement for the earthworms and accelerating the decomposition process. The weight, cocoon production and mortality of earthworms were monitored monthly. The ratios of stocking density treatment were 1:15, 1:10, 1:7.5, 1:6 and 1:5 of earthworm / media. The effect of stocking density at the ratio of 1:10 and 1:15 (earthworm /media) at the fifth week showed the higher growth response of earthworms. Meanwhile the highest earthworm density showed a higher concentration of total nitrogen (TN), K and Ca in vermicompost as its final product. Therefore it could be concluded that the vermicomposting process improved the quality of the compost materials with respect to nutrient content [86].

CONCLUSION

Oil palm is the major plantation in Malaysia and Indonesia. As the world palm oil demand is increasing generation of waste is also increasing. If they are discharged untreated, they may cause serious problem and deteriorates the environment in contact. Thus environmental management through waste management should be given main emphasis. There is a need of appropriate waste minimization or recycling technology which should be easy to operate and cost effective. As palm oil mill effluent is non toxic and considered as a good source of organic nutrients land application of

POME can be a suitable waste management option. Use of composting as well as vermicomposting technology is also an efficient waste management option. Vermicast are nutrient rich and devoid of pathogens. Using vermicompost/ compost in agriculture will help in recycling the plant nutrients and help the soil from soil degradation. By reducing the load on inorganic fertilizer it will also boost the economy. Moreover using vermicompost / compost as organic amendment will help in maintaining the sustainability of ecosystem. A new approach of vermicomposting POME by absorbing them on ligno-cellulosic solid matrix such as EFB or EFB fiber can also be very much helpful in tackling the waste management problem of both liquid as well solid wastes coming out from palm oil mill.

ACKNOWLEDGEMENT

The study was funded through Universiti Sains Malaysia (USM) short-term grant number 304/PTEKIND/6310003. The authors acknowledge USM for providing research facilities.

REFERENCES

1. Arif, S. and T. Tengku Mohd Ariff, 2001. The case study on Malaysian oil palm., 3-5.
2. Sarmidi., M.R., 2009. The Rich Mine for Pharma, Food, Feed and Fuel Industries. American-Eurasian J. Agriculture and Environmental Sci., 5(6): 767-776.
3. Yusoff, S. and S.B. Hansen, 2007. Feasibility study of performing a life cycle assessment on crude palm oil production in Malaysia. International J. Life Cycle Assessment, 12(1): 50.
4. Singh, R.P., M. Hakimi Ibrahim and Esa Norizan, 2010. Composting of waste from palm oil mill: A sustainable waste management practice. Review in Environmental Science and Biotechnology, DOI: 10.1007/s11157-010-9199-2.
5. Kittikun, A.H., P. Prasertsan, G. Srisuwan and A. Krause, 2000. Environmental Management of Palm Oil Mill. Internet Conference on Material Flow Analysis of Integrated Bio-Systems. March-October 2000 www.ias.unu.edu / proceedings / icibs / icmfa / kittikun / paper.html
6. Corley, R.H.V., 1983. Potential productivity of tropical perennial crops. Exp. Agric., 19: 217.
7. Rosnah, M.Y., A. Ghazali, W.D. Wan Rosli and Y.M. Dermawan, 2010. Influence of Alkaline Peroxide Treatment Duration on the Pulpability of Oil Palm Empty Fruit Bunch. World Appl. Sci. J., 8(2): 185-192.
8. Aziz, A. and Hanida B.T. Abdul, 2007. Reactive extraction of sugars from oil palm empty fruit bunch hydrolysate using naphthalene-2-boronic acid, Universiti Sains Malaysia, Thesis (Master of Science).
9. Sulaiman, A., 2010. Accelerated Start-up of a Semi-commercial Digester Tank Treating Palm Oil Mill Effluent with Sludge Seeding for Methane Production. World Appl. Sci. J., 8(2): 247-258.
10. Prasertsan, S. and P. Prasertsan, 1996. Biomass residues from palm oil mills in Thailand: an overview on quantity and potential usage. Biomass Bioenergy, 11(5): 87-395.
11. Pleanjai Somporn, H. Gheewala Shabbir and Garivait Savitri, 2004. Environmental Evaluation of Biodiesel Production from Palm Oil in a Life Cycle Perspective. The Joint International Conference on Sustainable Energy and Environment (SEE). 1-3 December (2004), Hua Hin, Thailand.
12. Yacob, S., Y. Shirai, M.A. Hassan, M. Wakisaka and S. Subash, 2006. Start-up operation of semi-commercial closed anaerobic digester for palm oil mill effluent treatment. Process Biochemistry, 41: 962-964.
13. Suthar, S., 2010. Recycling of agro-industrial sludge through Vermitechnology. Ecology Engineering, 36: 1028-1036.
14. Garg, P., A. Gupta and S. Satya, 2006. Vermicomposting of different types of waste using *Eisenia foetida*: A comparative study. Bioresource Technol., 97(3): 391-395.
15. Yusri, A., A. Mat Rasol, O. Mohammed, H. Azizah, T. Kume and S. Hashimoto, 1995. Biodegradation of oil palm empty fruit bunch into compost by composite micro-organisms. Paper presented at the EU-ASEAN conference on combustion of solids and treated product.
16. Danmanhuri, M.A., 1998. Hands-on experience in the production of empty fruit bunches (EFB) compost. Paper presented at the CETDEM Malaysian organic farming seminar, Petaling, Jaya, Selangor, Malaysia, pp. 50-61. Dateline: 25/10/2002 09:45:09r
17. Tate, D.J.M., 1996. The RGA history of the plantation industry in the Malay Peninsula. Oxford University Press, New York, pp: 688.
18. Igwe, J.C. and C.C. Onyegbado, 2007. A Review of Palm Oil Mill Effluent (Pome) Water Treatment. Global J. Envir. Resources, 1: 54-62.
19. Gopal, J., 2001. The Development of Malaysia's Palm Oil Refining Industry: Obstacles, Policy and Performance. PhD, thesis submitted to Imperial College, London. 190 rajah rasiah.

20. Khera, H.S., 1976. The oil palm industry of Malaysia: an economic study, Penerbit Universiti Malaya.
21. WU, T.Y., A.W. Mohammad, J.M. Jahim and N. Anuar, 2009. A holistic approach to managing palm oil mill effluent (POME): Biotechnological advances in the sustainable reuse of POME. *Biotechnology Advances*, 27: 40-52.
22. M.P.O.B., 2008. Malaysian Palm Oil Board. A summary on the performance of the Malaysian oil palm industry. <http://econ.mpob.gov.my/economy/Performance-130109.htm> 1.
23. Thani, M.I., R. Hussin, W.W.R. Ibrahim and M.S. Sulaiman, 1999. Industrial processes and the environment: crude palm oil industry. Handbook No. 3. Department of Environment, Kuala Lumpur, pp: 7-54.
24. Agamuthu, P., 1995. Palm oil mill effluent treatment and utilization. In: Sastry CA, Hashim MA, Agamuthu P (eds) Waste treatment plant. Narosa Publishing House, New Delhi, pp: 338-360.
25. Ma, A.N., 1999a. Treatment of palm oil mill effluent. In: Singh G, Lim KH, Leng T, David LK (eds) Oil palm and the environment: a Malaysian perspective. Malaysia Oil Palm Growers' Council, Kuala Lumpur, pp: 113-126.
26. Ma, A.N.M.A., 1999b. Treatment of palm oil mill effluent. In: Singh G, Huan LK, Teo L, Lee DK (eds) Oil palm and the environment. A Malaysian perspective. Malaysian Oil Palm Grower' Council, Malaysia, pp: 113-123.
27. Ahmad, A., S. Ismail and S. Bhatia, 2003. Water recycling from palm oil mill effluent (POME) using membrane technology. *Desalination*, 157(1-3): 87-95.
28. Sethupathi, S., 2004. Removal of Residues oil from palm oil mill effluent (POME) using Chitosan, Universiti Sains Malaysia.
29. Lorestani, A.A.Z., 2006. Biological treatment of palm oil effluent (POME) using an up-flow anaerobic sludge fixed film (UASFF) bioreactor [TD899. P4 L869 2006 f rb].
30. Yacob, S., M.A. Hassan, Y. Shirai, M. Wakisaka and S. Subash, 2005. Baseline study of methane emission from open digesting tanks of palm oil mill effluent treatment. *Chemosphere*, 59: 1575-1581.
31. Ma, A.N., 2000. Environmental management for the oil palm industry. *Palm. Oil. Dev.*, 30:1-10.
32. Davis, J.B. and P.J.A. Reilly, 1980. Palm oil mill effluent—a summary of treatment methods. *Oleagineux*, 35: 323-330.
33. Pierzynski, G.M., J.T. Sims and G.F. Vance, 2005. Soils and environmental quality. CRC press.
34. Hwang, T.K., S.M. Ong, C.C. Seow and H.K. Tan, 1978. Chemical composition of palm oil mill effluents. *Planter*, 54: 749-756
35. Vairappan, C.S. and A.M. Yen, 2008. Palm oil mill effluent (POME) cultured marine microalgae as supplementary diet for rotifer culture. *J. Appl. Physics*, 20(5): 603-608.
36. Khalid, A.R. and W.A.W. Mustafa, 1992. External benefits of environmental regulation: Resource recovery and the utilisation of effluents. *The Envir.*, 12(4): 277-285.
37. Habib, M.A.B., F.M. Yusoff, S.M. K.J. Phang and S. Mohamed, 1997. Nutritional values of chironomid larvae grown in palm oil mill effluent and algal culture. *Aquaculture*, 158: 95-105.
38. Muhrizal, S., J. Shamshuddin, I. Fauziah and M.A.H. Husni, 2006. Changes in iron-poor acid sulfate soil upon submergence. *Geoderma*, 131: 110-122.
39. James, R., K. Sampath and S. Alagurathinam, 1996. Effects of lead on respiratory enzyme activity, glycogen and blood sugar levels of the teleost *Oreochromis mossambicus* (Peters) during accumulation and depuration. *Asian fisheries science. Metro Manila*, 9(2): 87-100.
40. Wood, B.J., K.R. Pillai and J.A. Rajaratnam, 1979. Palm oil mill effluent disposal on land. *Agricultural Wastes*, 1: 103-127.
41. Ahmad, A.L., S. Bhatia, N. Ibrahim and J.M. Tan, 2000. Membrane technology in palm oil mill effluent treatment. Chemical and process engineering conference 2000, Singapore.
42. Fakhurul-Razi, A. and M.J.M.M. Noor, 1999. Treatment of palm oil mill effluent (POME) with the membrane anaerobic system (MAS). *Water Science Technology*, 39(10-11): 159-163.
43. Hoon, N.G., B.H. Hameed and A.L. Ahmad, 2001. Palm oil mill effluent treatment using extraction process: Preliminary results. *Proceedings regional conference for young Chemist.*, 276-279.
44. Setiadi, T. and A. Husaini Djajadiningrat, 1996. Palm oil mill effluent treatment by anaerobic baffled reactors: recycle effects and biokinetic parameters. *Water Sci. Technol.*, 34(11): 59-66.
45. Ugoji, E., 1997. Anaerobic digestion of palm oil mill effluent and its utilization as fertilizer for environmental protection. *Renewable Energy*, 10(Issue 2-3): 291-294.
46. Hojjat, M. and M.A.M. Salleh, 2009. Optimization of POME Anaerobic Pond. *J. European Scientific Res.*, 32: 455-459.

47. Nawawi Mohd, M.G., N. Othman, A.N. Sadikin, S.S. Khalid and N. Yusof, 2008. Development of empty fruit bunch filter with addition of chitosan for pre-treatment of palm oil mill effluent. *J. Chemical Natural Resources Eng.*, 2: 8-16.
48. Hameed, B.H., A.L. Ahmad and N. Hoon, 2003. Removal of residual oil from palm oil mill effluent using solvent extraction method. *Journal Teknologi.*, 33-42.
49. Perez, M., L.I. Romero and D. Sales, 2001. Organic matter degradation kinetics in an anaerobic thermophilic fluidised bed Bioreactor. *Anaerobe*, 7: 25-35.
50. Zahrim, A.Y., F.M. Rachel, S. Menaka, S.Y. Su, F. Melvin and E.S. Chan, 2009. Decolourisation of Anaerobic Palm Oil Mill Effluent via Activated Sludge-Granular Activated Carbon. *World Applied Sciences J. Volume 5 (Special Issue for Environment)*, pp: 126-129.
51. Ma, A.N. and A.S.H. Ong, 1985. Pollution control in palm oil mills in Malaysia. *Journal of the American Oil Chemists' Society*, 62: 261-266.
52. Onyia, C.O., A.M. Uyub, J.C. Akunna, N.A. Norulaini and A.K.M. Omar, 2001. Increasing the fertilizer value of palm oil mill sludge: bioaugmentation in nitrification. *Sludge Management Entering the Third Millenium-Industrial, Combined, Water and Wastewater Residues*, 44: 157-162.
53. NG, W.J., A.C.C. Goh and J.H. Tay, 1987. Palm oil mill effluent (POME) treatment- an assessment of coagulants used to aid liquid-solid separation. *Biological Wastes*, 21: 237-248.
54. Chin, K.K., S.W. Lee and H.H. Mohammad, 1996. A study of palm oil mill effluent treatment using a pond system. *Water Science Technol.*, 34: 119-123.
55. Schuchardt, F., K. Wulfert, D. Darnoko and T. Herawan, 2007. Effect of new palm oil mill processes on the EFB and POME utilisation. *Proceedings of Chemistry and Technology Conference PIPOC 2007, Kuala Lumpur, 26-30 August 2007*.
56. Rincón, B., F. Raposo, J.R. Domínguez, F. Millán, A.M. Jiménez, A. Martín and R. Borja, 2006. Kinetic models of an anaerobic bioreactor for restoring wastewater generated by industrial chickpea protein production. *International Biodeterioration and Biodegradation*, 57: 114-120.
57. Linke, B., 2006. Kinetic study of thermophilic anaerobic digestion of solid wastes from potato processing. *Biomass and Bioenergy*, 30: 892-896.
58. Quah, S.K., K.H. Lim, D. Gillies, B.J. Wood and J. Kanagaratnam, 1982. *Proc. Regional Workshop on Palm Oil Mill Technology and Effluent Treatment*, PORIM, Kuala Lumpur, 193-200.
59. Ahmad, A.L., S. Ismail and S. Bhatia, 2005. Ultrafiltration behavior in the treatment of agro-industry effluent: Pilot scale studies. *Chemical Engineering Sci.*, 60: 5385-5394.
60. Olie, J.J. and T.D. Tjeng, 1972. Traitment et evacuation des eaux résiduaires d'une huilerie de palm. *Oleagineux*, 27: 215-218.
61. Stanton, W.R., 1974. Treatment of effluent from palm oil factories. *Planter*, 50: 382-387.
62. Macci, C., G. Masciandaro and B. Ceccanti, 2009. Vermicomposting of olive oil mill wastewaters. *Waste Manage Resources*, 28(8): 738.
63. Zakaria, Z.Z., H. Khalid and A.B. Hamdan, 1994. Guidelines on land application of palm oil mill effluent (POME). *PORIM Bull Palm Oil Res. Inst. Malaysia*, pp: 28.
64. Chooi, C.F., 1984. Ponding system for palm oil mill effluent treatment.
65. Epstein, E., 1997. *The science of composting*. Technomic Publishing Co. Inc., Lancaster.
66. Ipek, U., E. Obek, L. Akca, E.I. Arslan, H. Hasar, M. Dogru and O. Baykara, 2002. Determination of degradation on radioactivity and its kinetics in aerobic Composting. *Bioresource Technol.*, 84: 283-286.
67. Mathur, S.P., G. Owen, H. Dinel and M. Schnitzer, 1993. Determination of compost biomaturity. I. Literature review. *Biological Agricultural Horticulture*, 10: 65-85.
68. Tam, N.F.Y. and S.M. Tiquia, 1994. Assessing toxicity of spent pig litter using a seed germination technique. *Resource Conservation and Recycling*, 11: 261-274.
69. Khan, M.A.I., K. Ueno, S. Horimoto, F. Komai, K. Tanaka and O. Yoshitaka, 2009. Physicochemical, including spectroscopic and biological analyses during composting of green tea waste and rice bran. *Biology and fertility of soils*, 45: 305-313.
70. Ordoñez, C., M. Tejada, C. Benitez and J.L. Gonzalez, 2006. Characterization of a phosphorus-potassium solution obtained during a protein concentrate process from sunflower flour. Application on rye-grass, *Bioresource Technol.*, 97: 522-528.

71. Abd-rahman, R., S. Kalil Mohd and Y. Abu Zahrim, 2003. Composting palm oil mill sludge-sawdust: effect of different amount of sawdust. In: Proceedings of national workshop in conjunction with ARRPET workshop on wastewater treatment and recycling 2: removal chloroorganics and heavy metals. ISBN 983-2982-04-9.
72. Cayuela, M.L., M.A. Sanchez-Monedero and A. Roig, 2005. Evaluation of two different aeration systems for composting two-phase olive mill wastes. *Process Biochemistry*, 41: 616-623.
73. Costa, F., C. García and T. Hernández, 1992. Residuos orgánicos urbanos. Manejo y utilización. CSIC, Madrid.
74. Baharaddin, A.S., M. Wakisaka, Y. Shirai, S. Abd-AZIZ, A.A. Rahman and M.A. Hassan, 2009. Co-composting of empty fruit bunches and partially treated palm oil mill effluents in pilot scale. *International J. Agriculture Res.*, 4: 69-78.
75. Bhamidimarri, S.M.R. and S.P. Pandey, 1996. Aerobic thermophilic composting of piggery solid wastes. *Water Science and Technol.*, 33: 89-94.
76. Yaser, A.Z., R.A. Rahman and M.S. Kalil, 2007. Co-composting of palm oil mill sludge-sawdust. *Pakistan Journal of biological sciences, PJBS*, 10: 4473.
77. Edwards, C.A. and P.J. Bohlen, 1996. *Biology and ecology of earthworms*, Springer.
78. Edwards, C.A., 1988. Breakdown of animal, vegetable and industrial organic wastes by earthworms. *Earthworms in Waste and Environmental Management*, 21-31.
79. Hartenstein, R. and F. Hartenstein, 1981. Physicochemical changes effected in activated sludge by the earthworm *Eisenia foetida*. *J. Environmental Quality*, 10: 377.
80. Sabine, J.R., 1978. The nutritive value of earthworm meal. *Utilization of Soil Organisms in Sludge Management*. National Technical Information Services. PB286932, Springfield, VA, 285-296.
81. Ndegwa, P.M. and S.A. Thompson, 2001. Integrating composting and vermicomposting the treatment and bioconversion of biosolids. *Bioresource Technol.*, 76: 107-112.
82. Nagavallema, K.P., S.P. Wani, P.V.V. Stephane Lacroix, C. Vineela, M. Babu rao and K.L. Sahrawat, 2004. *Vermicomposting: Recycling wastes into valuable organic fertilizer*. Global Theme on Agrecosystems Report.
83. Hand, P., W.A. Hayes, J.C. Frankland and J.E. Satchell, 1988. The vermicomposting of cow slurry. In: *Earthworms in waste and Environmental Management*, pp: 49-63.
84. Longsdon, G., 1994. Worldwide progress in vermicomposting. *Biocycle*, 35: 63-65.
85. Ghosh, M., G.N. Chattopadhyay and K. Baral, 1999. Transformation of phosphorus during vermicomposting. *Bioresource Technol.*, 69: 149-154.
86. Sabrina, D.T., M.M. Hanafi, T.M.M. Muhmud and A.A. Norazwady, 2009. Vermicomposting of Oil Palm Empty Fruit Bunch and its potential in supplying of nutrients for crop growth. *Compost science and utilization*, 17(1): 61-67.
87. Butt, K.R., 1993. Utilisation of solid paper-mill sludge and spent brewery yeast as a feed for soil-dwelling earthworms. *Bioresource technol.*, 44: 105-107.
88. Elvira, C., M. Goicoechea, L. Sampdro, S. Mato and R. Nogales, 1996. Bioconversion of solid paper-pulp mill sludge by earthworms. *Bioresource Technol.*, 75: 173-177.
89. Chaudhuri, P.S. and G. Bhattacharjee, 2002. Capacity of various experimental diets to support biomass and reproduction of *Perionyx excavatus*. *Bioresource technol.*, 82: 147-150.
90. Gunadi, B. and C.A. Edwards, 2003. The effects of multiple applications of different organic wastes on the growth, fecundity and survival of *Eisenia fetida* (Savigny)(Lumbricidae). *Pedobiologia- International J. Soil and Biol.*, 47: 321-329.
91. Gunadi, B., C. Blount and C.A. Edwards, 2002. The growth and fecundity of *Eisenia fetida* (Savigny) in cattle solids pre-composted for different periods. *Pedobiologia.*, 46: 15-23.