

## Experimental Study on Scour Depth in Around a T-shape Spur Dike in a 180 Degree Bend

<sup>1</sup>Alireza Masjedi, <sup>2</sup>Vahid Dehkordi, <sup>2</sup>Mehdi Alinejadi and <sup>3</sup>Amir Taeedi

<sup>1</sup>Islamic Azad University Ahwaz Branch, Ahwaz, Iran

<sup>2</sup>MSc, Khuzestan Science and Research Branch, Islamic Azad University, Ahwaz, Iran

<sup>3</sup>MSc, Shahid Chamran University, Ahwaz, Iran

---

**Abstract:** In this study results of experimental study on scour depth around a T-shape spur dike in a 180 degree channel bend are presented. Experiments were conducted in a laboratory channel to measure the variations of bed topography under a clear water condition. Experiments were conducted for different locations, lengths and wings of T-shape spur dikes at the bend with various Froude number. In this study, the time development of the local scour around the T-shape spur dike plates was studied. It was found that by increasing the Froude number and length and wing length of T-shape spur dike the amount of scour depth increases and increases depth of scour occurs at location of 60 degree. Measuring depth of scouring based on experimental observation, an empirical relation is developed with high regression coefficient 97%.

**Key words:** T-shape spur dike · Scouring · 180degree channel bend · Equilibrium scour

---

### INTRODUCTION

A spur dike may be defined as a structure extending outward from the bank of a stream for the purpose of reflecting the current away from the bank to protect it from erosion. In addition to bank protection, spur dikes have also been used to enhance aquatic habitat by creating stable pools in unstable streams [1].

Local scour holes form around spur dikes due to the action of flow against these obstructions. Estimates can be made of the maximum local scour likely to occur for a foundation under given flow and sediment conditions. It then becomes necessary to understand the development of local scour with time. The rapid development of scour depths under live-bed conditions means that equilibrium scour depths are obtained rapidly for such flows, with rates of scour development less important to the designer.

Result of spur dike construction against flow, there will be a difference in hydrostatic pressure at upstream and downstream of the construct which will cause a whirlpool disturbance around it. These whirlpool flows account for the main local scouring mechanism which in long term, produce large vortices at spur dike head and this lead to construct failure. One of the important

indicators in determining specifications of scoring and predicating the position and expanding range is maximum scouring depth.

Estimation of the depth of scour in the vicinity of spur dikes has been the main concern of engineers for years. Therefore, knowledge of the anticipated maximum depth of scour for a given discharge is a significant criterion for the proper design of a spur dike foundation.

Cardoso and Bettess [2] studied the effects of time and channel geometry on scour at bridge abutments and suggested an exponential function. Oliveto and Hager [3] studied the temporal evolution of clear-water pier and abutment scour and found that the principal parameter influencing the scour process is the densimetric particle Froude number so suggested an logarithmic formula.

Coleman *et al.* [4] studied clear-water scour development at bridge abutments and suggested an logarithmic formula. The dimensionless time to equilibrium for scour development from plane-bed conditions can be expressed as a function of relative flow intensity and relative abutment length. Recently Ghodsian and Mousavi [5] correlated the maximum scour depth in a channel bend to densimetric Froude number, relative bend radius and relative depth of flow.

Fazli *et al.* [6] studied the scour and flow field at a spur dike in a 90 degree channel. It is obvious that there is lack of knowledge regarding the scour and flow pattern around the spur dike in a curved channel. Also the characteristics of flow pattern have been shown to be affected by the location of spur dike. It was found that: Bed topography in the bend is influenced by location of spur dike in the bend. When the spur dike is located in the second half of the bend, deposition is occurred near the outer bank at the exit of the bend. When spur dike is located in the first half of the bend erosion occurred in this region. Diversion of water by the spur dike cause a narrow zone of degradation in the channel from upstream stagnation zone up to downstream of standing eddy zone. Froude number is an important parameter and has a direct relation to maximum relative scour depth and height of point bar. By increasing the Froude number these parameters increases. By increasing the length of spur dike, the scour depth increases. New empirical equation for estimation of maximum scour depth is presented.

Ghodsian and Vaghefi [7] studied scour and flow field in a scour hole around a T-shape spur dike in a 90 degree bend. The effects of the length of the spur dike, the wing length of the spur dike and Froude number on the scour and flow field around a T-shape spur dike in a 90 degree bend were investigated in this study. The main results of this experimental study are: At the upstream of the spur dike, a main vortex with anti-clock wise direction is formed in the zone of the spur dike. At section 77.5 degree of the bend a vortex having a clock wise direction is formed between the spur dike wing and the channel wall. The maximum value of the longitudinal velocity component at section 65 degree of the bend is close to the outer wall of the channel and near the water surface. By increasing Froude number the maximum scour depth and the volume of scour hole increases. The dimensions of the scour hole increase as a result of increase in the length of the spur dike. The amount of scour at the upstream of spur dike is much more as compare to that at the downstream of spur dike.

Masjedi *et al.* [8] studied on the time development of local scour at a spur dike in a 180 degree flume bend. Tests were conducted using one spur dike with 110 mm length in position of 60 degree under four flow conditions. In this study, the time development of the local scour around the spur dike plates was studied. The effects of various flow intensities ( $u^*/u^*c$ ) on the temporal development of scour depth at the spur dike were also studied. The time development of the scour hole around the model spur dike installed was compared with similar

studies on spur dikes. The results of the model study indicated that the maximum depth of scour is highly dependent on the experimental duration. It was observed that, as flow intensities ( $u^*/u^*c$ ) increases, the scour increases. Measuring time and depth of scouring based on experimental observation, an empirical relation is developed with high regression coefficient 97%.

The scour geometry around a T-shape spur dike in a bend depends on channel geometry (channel width, channel radius and bed slope), spur dike characteristics (length and wing spur dike, angle with bank, location in bend), flow conditions (approach depth and discharge or velocity), sediment properties (specific gravity, grain size, friction angle) and fluid parameters (density and viscosity). Therefore for depth of scour  $ds$  one can write:

$$ds = f(L, l, \alpha, \theta, y, B, S_0, V, g, d_{50}, R, \rho_s, \phi, \rho, \mu, t) \quad (1)$$

In which  $L$  is length of spur dike,  $l$  is wing of spur dike,  $\alpha$  is angle of spur dike with bank,  $\theta$  is location of spur dike in bend,  $y$  is approach flow depth,  $B$  is channel width,  $S_0$  is bed slope,  $V$  is approached flow velocity,  $g$  is gravitational acceleration,  $d_{50}$  is median grain size,  $R$  is radius of bend,  $\rho_s$  is density of sediment,  $\phi$  is friction angle of sediment,  $\rho$  is density of fluid,  $\mu$  is viscosity of fluid and  $t$  is time of scour. Using dimensional analysis, Eq. (2) can be written as:

$$\frac{ds}{y} = f\left(Fr, \theta, \alpha, S_0, \phi, Re, \frac{L}{B}, \frac{l}{L}, \frac{R}{B}, \frac{L}{d_{50}}, \frac{\rho_s}{\rho}, \frac{R}{L}, \frac{t}{t_e}\right) \quad (2)$$

In which  $Fr$  is approach Froude number,  $Re$  is Reynolds number and  $t_e$  is maximum of time development of scour. After simplification of above equation and eliminating the parameters with constant values, one can have:

$$\frac{ds}{y} = f\left(Fr, \frac{L}{B}, \frac{l}{L}, \frac{\theta}{180}, \frac{t}{t_e}\right) \quad (3)$$

## MATERIALS AND METHODS

All of the experiments were conducted in a flume located at hydraulic laboratory of Islamic Azad University of Ahwaz. The flume channel is recirculation, with central angle of 180degree, central radius ( $R_c$ ) of 2.8 m and width ( $B$ ) of 60 cm. Straight entrance flume with the length of 9.1 m was connected to the 180degree bend flume.

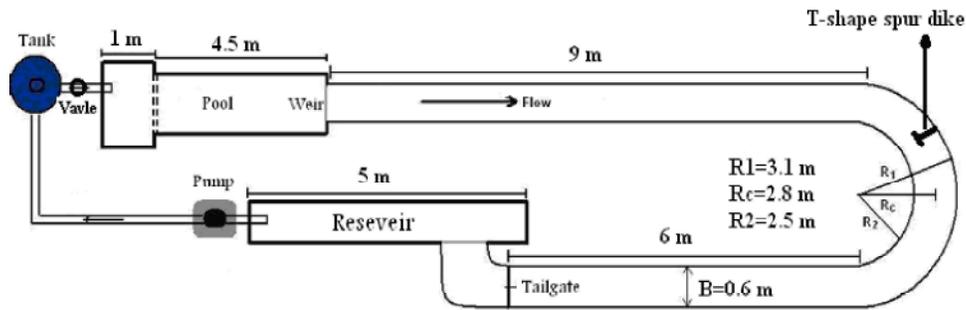


Fig. 1: The experimental setup (Plan)

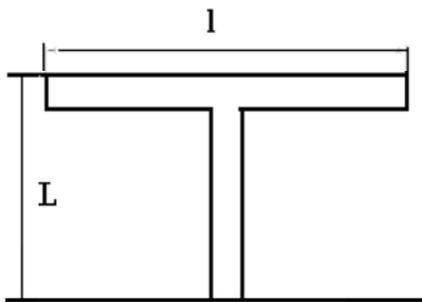


Fig. 2: A T-shape spur dike (Plan)

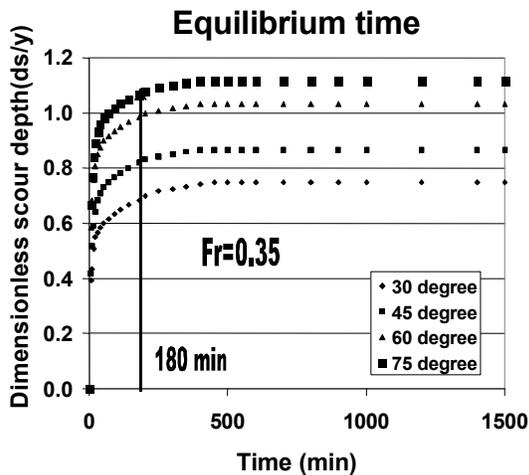


Fig. 3: Equilibrium time in the different position for a T-shape spur dike

This bend flume is connected to another straight flume with the length of 5.5 m. Relative curvature of bend ( $R_c/B$ ) was 4.7 which defines it as a mild bend. The test area of the flume is made up of an aluminum bottom and Plexiglas sidewalls along one side for most of its length to facilitate visual observations. At the end of this flume a controlling gate was designed to adjust the water surface height at the desired levels (Fig.1).

The experiments was carried out using four length for spur dike (i.e.  $L=10\%,15\%,20\%$  and  $25\%$  of the channel width) and four wing length of spur dike (i.e.  $l=25\%,50\%,75\%$  and  $100\%$  of the spur dike length) were used [9].

Figure 2 shows a schematic illustration of a T-spur dike in flume.

The spur dikes were made of Plexiglas T-shape in plan and located at section 30, 45, 60 and 75 degree in the bend. The T-shape spur dikes were of 10mm thick and 55 cm high.

Uniform sediment with median size of  $d_{50} = 2$  mm and geometric standard deviation  $\sigma_g = 1.7$  was used with a thickness of 0.2m and covered the total length of channel [10].

In this study the experiments were performed under clear-water conditions at four different flow intensities ( $U / U_c$ ) of 0.61,0.68,0.74 and 0.85 corresponding to a shear stress levels of 37%,48%,57% and 78% of the critical shear stress level based on Shields stress, respectively [10]. Here  $U$  is approach flow velocity and  $U_c$  is critical velocity for sediment movement. Four Froude numbers of 0.23,0.25,0.28 and 0.35 were applied in order to investigate the effect of flow conditions on the scouring.

Equilibrium scour occurs when the scour depth does not change appreciably with time. For this purpose the experiments were conducted with spur dike having  $l/L=0.25$ , Froude number 0.35 which corresponds to  $U/U_c=0.85$  respectively and locations of 30, 45, 60 and 75 degree a T-shape spur dike. Experiments were run under clear water scour regime for a period of more than 24 hrs when movement of sediment from scour hole was almost negligible and equilibrium state of scour reached. The results are shown in Fig.3. As it can be seen approximately 93% of scouring occurs during the first 3 hours. Therefore in all remaining of our experimental tests, duration of 3 hours was selected for each test.

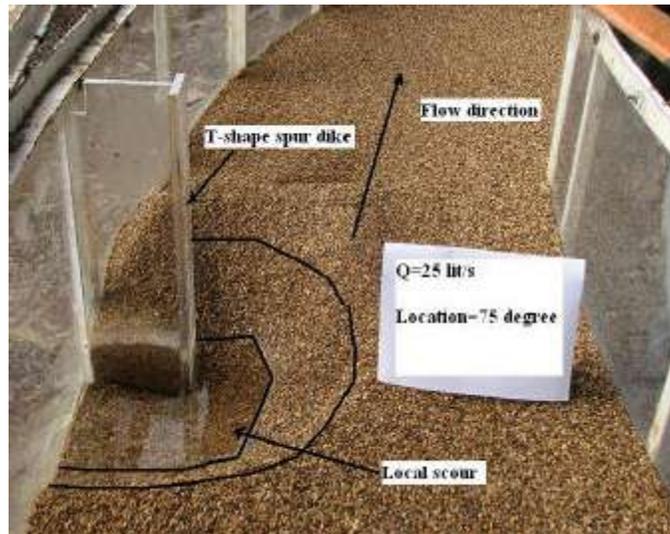


Fig. 4: Scour pattern at the end of a test

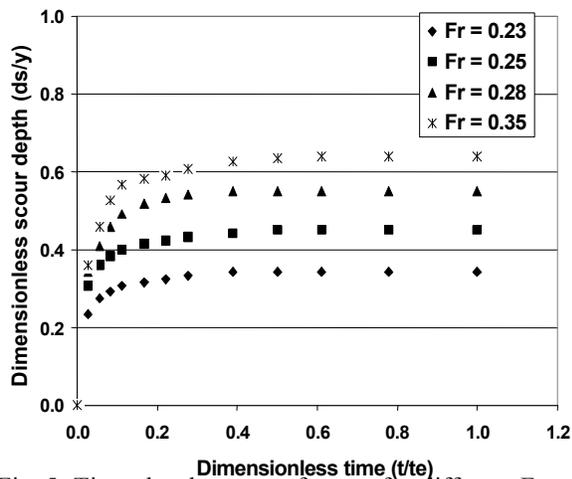


Fig. 5: Time development of scour for different Froude number

The following procedure was used for each experimental run. Before the experiment with the T-shape spur dike model in place, the sediment bed surface was leveled with a scraper blade mounted on a carriage that rode on the steel rods. After the bed was completely wetted and drained. The flume was then filled with water to obtain the desired depth. Before the pump was started an initial set of transects of the anticipated scour region was collected. At the completion of each test, the pump was shut down to allow the flume to slowly drain without disturbing the scour topography. The flume bed was then allowed to dry, during which time photos of the scour topography around the pier were taken and the final maximum scour depth was recorded using the point gauge having an accuracy of  $\pm 0.01$ mm (Fig.4).

## RESULTS

**Effect of Froude Number on the Scour:** Figure 5 shows effect of Froude number on the time development for  $L/B=0.15$ ,  $l/L=0.25$  and location of 45 degree at 180 degree flume bend. Four different Froude numbers 0.23,0.25,0.28 and 0.35 were applied in order to investigate the effect of flow conditions on the scouring. Increasing Froude number is associated by increase in the flow velocity, as a result the amount of scour increases.

The influence of Froude number on the relative maximum scour depth  $ds_{max}/y$  is shown in Fig. 6 for  $L/B=0.15$  and  $l/L=0.25$ . It is evident from this figure that by increasing Froude number the maximum relative scours depth increases.

**Effect of Length of T-shape Spur Dike on the Scour:** Figure 7 shows effect of length of T-shape spur dike on the time development for  $Fr=0.35$  and location of 45 degree at 180 degree flume bend. Four different length of T-shape spur dike  $L/B=0.25$ ,  $L/B=0.20$ ,  $L/B=0.15$  and  $L/B=0.10$  were applied in order to investigate the effect of length of T-shape spur dike on the scouring. As it can be seen from Figure 8, all lengths, at location of 45 degree results maximum increases in scour depth.

Figure 8 shows, typical dimensionless graphs for the relative maximum depth of scour  $ds_{max}/y$  against  $L/B$ . This figure corresponds to  $Fr = 0.35$  for four location. It is evident from this figure that by increasing length of the T-shape spur dike the maximum relative scours depth increases. The main reason of such finding is that increase in length, value of vortex maximum.

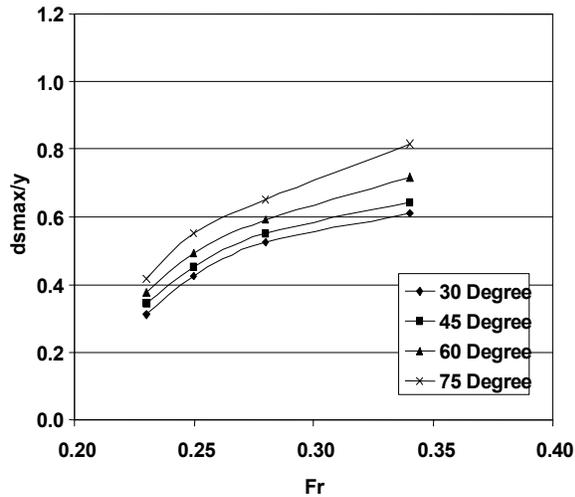


Fig. 6: Effect of Froude number on relative maximum depth of scour

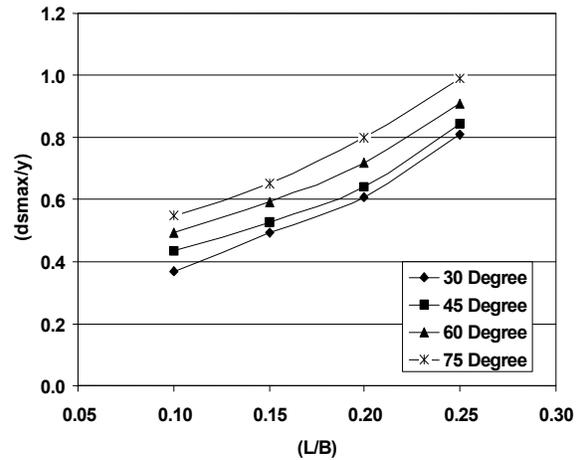


Fig. 8: Effect of length on relative maximum depth of scour

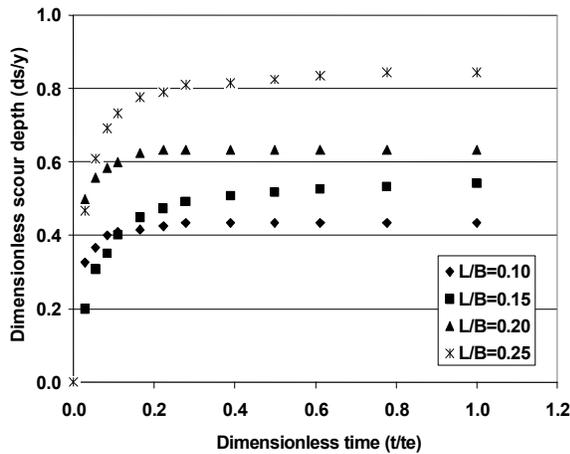


Fig. 7: Time development of scour for different lengths

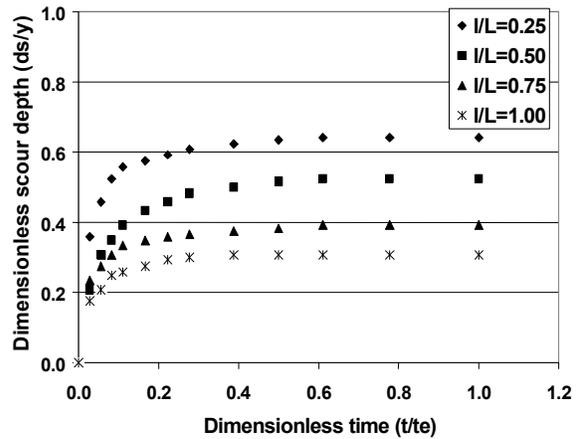


Fig. 9: Time development of scour for different wing lengths

**Effect of Wing Length of T-shape Spur Dike on the Scour:** Figure 9 shows typical influences of the wing length of the T-shape spur dike on the time development for  $Fr=0.35$ ,  $L/B=0.15$  and location of 45 degree. Four different wing length of T-shape spur dike  $l/L=0.25$ ,  $l/L=0.50$ ,  $l/L=0.75$  and  $l/L=1.00$  were applied in order to investigate the effect of wing length of T-shape spur dike on the scouring. It was found that as the wing length in the T-shape spur dike decreases from  $l/L=1.00$  to  $l/L=0.25$ , the scour dimensions increases.

Figure 10 show typical dimensionless graphs for the relative maximum depth of scour  $ds_{max}/y$  against  $l/L$  respectively. This figure corresponds to  $Fr = 0.35$  for four location. It is clear that the wing length of the spur dike increase, the maximum depth of scour decreases.

**Effect of Location of T-shape Spur Dike on the Scour:** Figure 11 shows typical influences of the location of the T-shape spur dike on the time development for  $Fr=0.35$ ,  $l/L=0.25$  and  $L/B=0.15$ . Four different location of T-shape spur dike  $\theta=30$ ,  $\theta=45$ ,  $\theta=60$  and  $\theta=75$  degree were applied in order to investigate the effect of location of T-shape spur dike on the scouring. As it can be seen from Figure 12, at location of 60 degree results maximum increases in scour depth.

Figure 12 show typical dimensionless graphs for the relative maximum depth of scour  $ds_{max}/y$  against  $\theta/180$  respectively. This figure corresponds to  $L/B=0.15$  and  $Fr = 0.35$  for four  $l/L$ . It is clear that the location of the spur dike increase at bend, the maximum depth of scour increase.

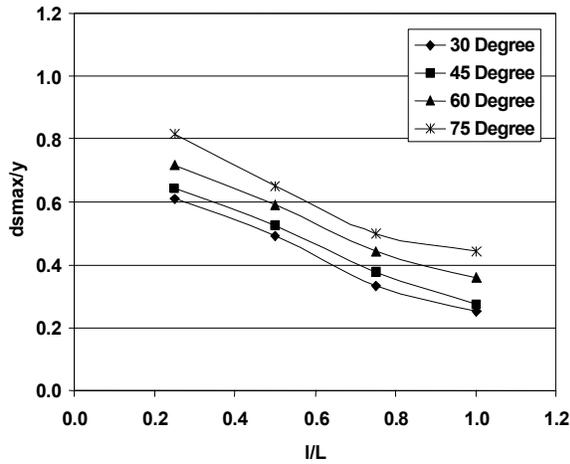


Fig. 10: Effect of wing length on relative maximum depth of scour

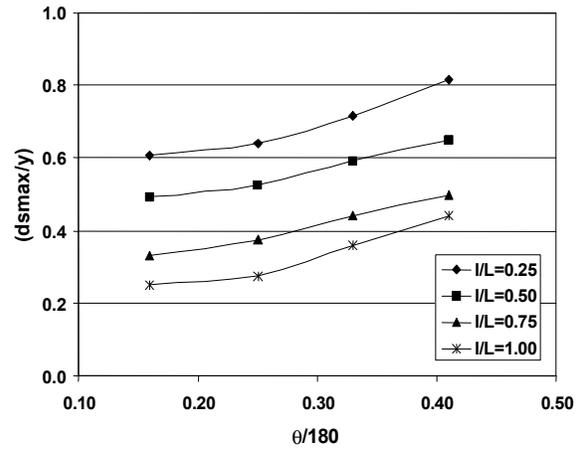


Fig. 12: Effect of location on relative maximum depth of scour

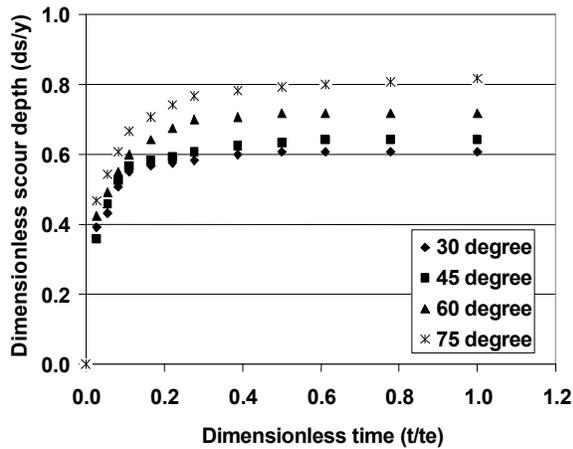


Fig. 11: Time development of scour for different locations

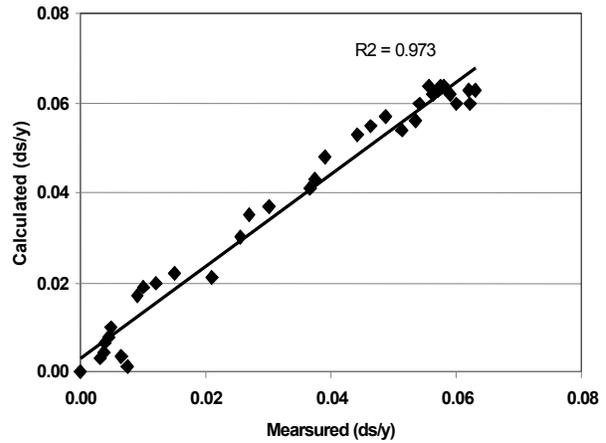


Fig. 13: Comparison of measured and predicted scour depth

**Equation for Scour Depth: the Equation (3) Can Be Written As:**

$$\frac{ds}{y} = a(Fr)^b \left(\frac{L}{B}\right)^c \left(\frac{l}{L}\right)^d \left(\frac{\theta}{180}\right)^e \left(\frac{t}{t_e}\right)^f \quad (4)$$

In which a, b, c, d, e and f are empirical constants and can be found using experimental data. By using least squares method for all the data it was found. Therefore, equation (4) can be written as:

$$\frac{ds}{y} = 1.25(Fr)^{0.5} \left(\frac{L}{B}\right)^{0.25} \left(\frac{l}{L}\right)^{0.05} \left(\frac{\theta}{180}\right)^{0.25} \ln\left(\frac{t+t_e}{t_e}\right)^{0.45} \quad (5)$$

With regression coefficient of 0.97. Here  $\theta$  is in radian. Figure 13 shows the comparison of calculated values with use to Eq. (5) and tested values of

relative maximum scour depth. It is evident that Eq. (5) predicts the maximum scour depth with acceptable accuracy.

### CONCLUSIONS

The effects of Froude number, the length, the wing length and location of spur dike on the scour and flow field around a T-shape spur dike in a 180 degree bend were investigated in this study. It was found that:

- By increasing Froude number the maximum scour depth increases.
- By increasing the length of the T-shape spur dike the maximum scour depth increases.
- By increasing the wing length of the spur dike, the maximum depth of scour decreases.

- Increases depth of scour occurs at location of 75 degree.
- The comparison of the present study data with predicts formula shows good accuracy.
- Measuring depth of scouring based on experimental observation, an empirical relation is developed with high regression coefficient 97%.

#### **ACKNOWLEDGE**

Author thankfully acknowledge the financial support provided by Islamic Azad University Ahwaz Branch.

#### **REFERENCES**

1. Klingeman, P.C., S.M. Kehe and Y.A. Owusu, 1984. Streambank erosion protection and channel scour manipulation using rockfill dikes and gabions. Rep. No. WRR-98, Water Resources Research Institute, Oregon State Univ. Corvallis, Ore.
2. Cardoso, A.H. and R. Bettess, 1999. Effects of time and channel geometry on scour at bridge abutments, *J. Hydraulic Engineering*, 125(4): 388-399.
3. Oliveto, G. and W.H. Hager, 2002. Temporal evaluation of clear-water pier and abutment scour. *J. Hydraulic Engineering, ASCE*. 128(9): 811-820.
4. Coleman, S.E., C.S. Lauchlan and B.W. Melville, 2003. Clear-water scour development at bridge abutments, *Journal of Hydraulic Engineering*, 41: 521-531.
5. Ghodsian, M. and S.K. Mousavi, 2006. Experimental study on bed scour in a 90o channel bend. *International J. Sediment Res.*, 21(4): 321-328.
6. Fazli, M., M. Ghodsian and S.A.A. Salehi, 2008, Scour and flow field around a spur dike in a 90o bend. *International J. Sediment Res.*, 23(1): 56-68.
7. Ghodsian, M. and M. Vaghefi, 2009. Experimental study on scour and flow field in a scour hole around a T-shape spur dike in a 90° bend, *International J. Sediment Res.*, 24(2): 145-158.
8. Masjedi, A., Shafai M. Bejestan and A. Moradi, 2010. Experimental study on the time development of local scour at a spur dike in a 180 degree flume bend. *J. Food, Agriculture and Environment*, 8(2): 904-907.
9. Donat, M., 1995. Bionengineering techniques for streambank restoration: A review of Central European practices, watershed restoration project report No.2, University of British Columbia, Austria.
10. Dey, S., S.K. Bose and G.L.N. Sastry, 1995. Clear water scour at circular piers: a model. *Journal of Hydraulic Engineering*, 121(12): 869-876.
11. Miller, M.C., I.N. McCave and P.D. Komar, 1977. Threshold of sediment motion under unidirectional currents. *Sedimentol.*, 4: 507-527.